

Professional



TEHNIČKE KARAKTERISTIKE I OPREMA

- Max. temperatura pumpanog medija 35 °C
- Zaštita motora IP68
- Izolacija: Class F
- Modeli sa plovkom te strujnom zaštitom
- Kabel H07 RN-F : dužine 10 m
- Uže za spuštanje : dužine 20 m
- Max. promjer krutih čestica : 2 mm
- Max. broj ukapčanja na sat : 45
- Min. usisni nivo : 60 mm
- Max. uranjanje u vodu : 20 m
- Izlaz tj. priključak : 1" (25 mm)


MATERIJALI IZRADE PUMPE

- Tijelo pompe: Moplen
- Kućište motora: Aluminij
- Osovina : INOX
- Vanjski plašt : INOX
- Rotor pompe (lopatica) : Noryl
- Usisni dio : Moplen
- Mehanička brtva



UPOTREBA

- Pumpanje čiste te lagano zamuljene vode

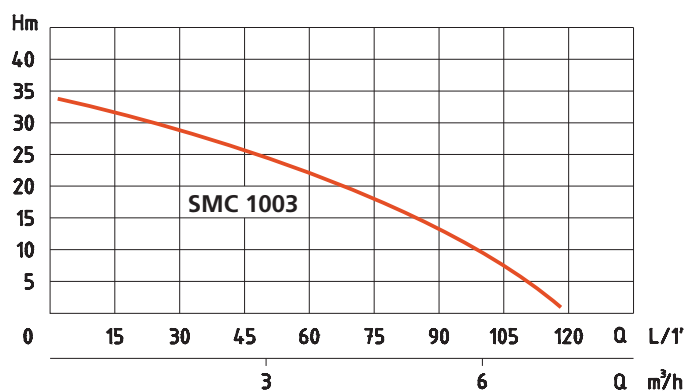

Vaš život , naša kvaliteta , diljem svijeta

TIP PUMPE	SMC 1003
Snaga P1	1000 W
Napon	230 V
Frekvencija	50 Hz
Ampera	4,5 A
Q max.	120 l/min
H max.	34 m
Izlaz	1"