


# KONTROLNE JEDINICE NIŽEG PRITISKA




UCM

TIP	KAPACITET		PRITISAK (Max)	BROJ VENTILA	MASA kg	DIMENZIJE			ULAZ mm	POVRAT mm	IZLAZ mm	
	L/min	gpm				bar	psi	LxHxW				mm
ECM	160	42.3	20	290	2 - 4 - 6	1,2 ÷ 1,6	153÷306	250	252	Ø 25	Ø 25	Ø 12 (10-20 Opt)
UCM	160	42.3	20	290	2 - 4 - 6	2,3 ÷ 2,7	235÷376	320	334	Ø 25	Ø 25	Ø 12 (10-20 Opt)
IDROMINUS	160	42.3	20	290	4 - 5 - 6	3 ÷ 3,2	346÷426	320	340	Ø 25	Ø 25	Ø 12 (10-20 Opt)
IDROCOSTANT M	280	74	20	290	4 - 5 - 6 - 7 - 8	7,2 ÷ 8	405÷610	535	412	Ø 35	Ø 35	Ø 12 (10-20 Opt)
GS 20 S	80	21.1	20	290	3	1,6	240	220	205	Ø 20	Ø 18	Ø 10
RM 20 S	115	30.4	20	290	3	1,6	257	193	266	Ø 25	Ø 25	Ø 10
VDR 20 S	135	35.7	20	290	4	2,2	237	308	300	Ø 25	Ø 25	Ø 10

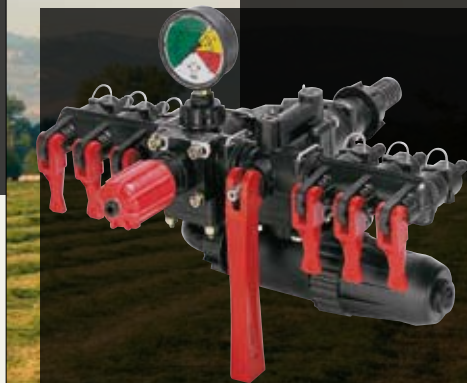

ECM  
AR 70bp÷AR160bp

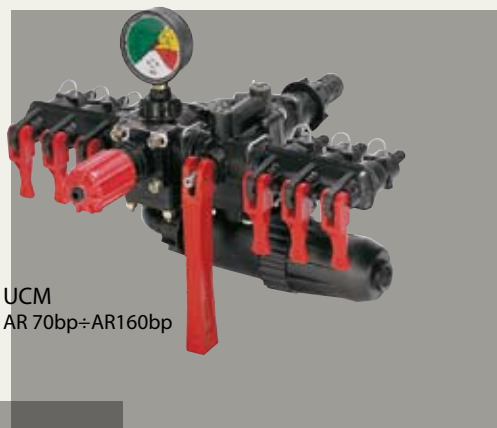

UCM  
AR 70bp÷AR160bp



IDROMINUS  
AR 70bp÷AR160bp



IDROCOSTANT M  
AR 70bp÷AR280bp



GS 20 S  
AR 70bp



RM 20 S  
AR 70bp÷AR115bp



VDR 20 S  
AR 70bp÷AR135bp

7



BP series