

BEST BIG...



INTERNATIONAL CORPORATION



TEHNIČKE KARAKTERISTIKE

- Max. temperatura pumpanog medija 40°C
- Zaštita motora IP68
- Izolacija: Class F
- Kabel H07 RN-F : dužine 20 m
- Svim modelima korisnik treba osigurati strujnu zaštitu te zaštitu od rada na suho !!!
- *** Dostupna opcija na zahtjev :
>>> trofazni zaštitni el. upravljački ormar



MATERIJALI IZRADE PUMPE

- Tijelo pumpe : Aluminijska legura
- Osovina : Inox 431
- Rotor pumpe (lopatica) : tvrdi ljev
- Duplo brtvljenje unutar komore


UPOTREBA

- Pumpanje čiste te zaprljane otpadne vode


PERFORMANSE

n= 2900 1/min


TIP PUMPE	SNAGA		m ³ /h l/min	0	20	40	60	80	100	120	140	160	180	200	220	240	260	280	
	kW	Ampera		0	333	666	1000	1333	1666	2000	2333	2666	3000	3333	3666	4000	4333	4666	
Trofazne 3x400V																			
BEST BIG 4kW...	4.0	8.6	H metara	19	17	15	12	9	5.5	1									
BEST BIG 5,5kW...	5.5	11.9		23	21	18	15	12	9.5	5	1								
BEST BIG 5,5kW (H)...	5.5	11.9		30	25	19	12	2											
BEST BIG 7,5kW...	7.5	15.2		25	24	22	21	18	16	12.8	11	8	5	1.8					
BEST BIG 10kW...	10.0	19.1		32	32	28	26	24	22	20	18	16	13	11	9	6	4	1	
BEST BIG 10kW (H)...	10.0	19.1		45	41	36	26	12											

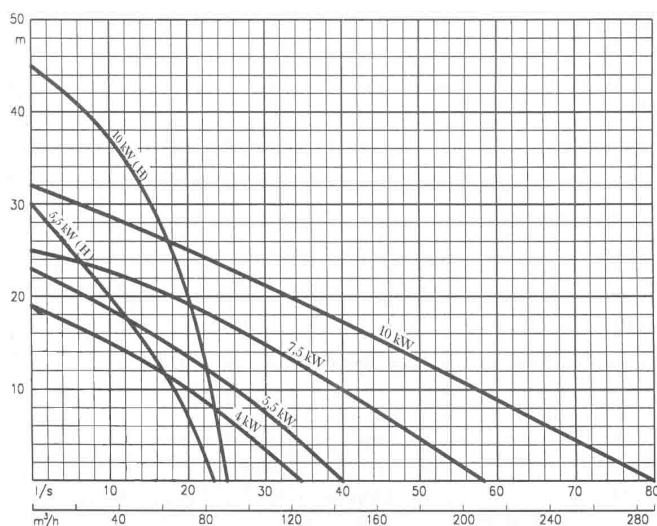

DIMENZIJE :

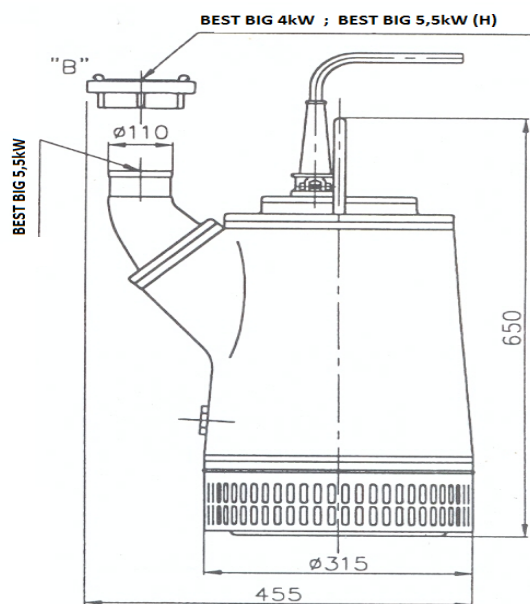

A = \varnothing 110 mm - BEST BIG 7,5kW ; BEST BIG 10kW (H)
 A = \varnothing 150 mm - BEST BIG 10kW

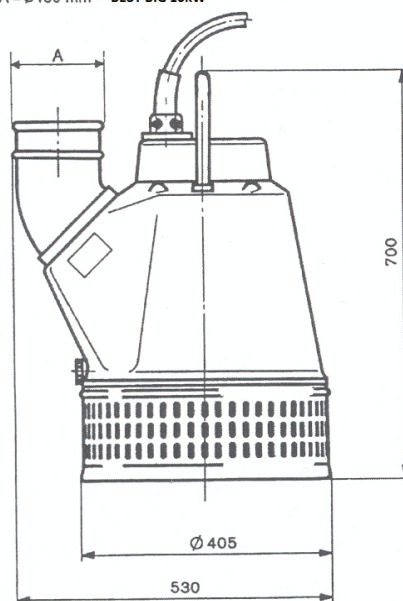

OSTALI PARAMETRI :

TIP PUMPE	Max. krute čestice	Metoda startanja	Tlačni priključak		Motorna zaštitna sklopka	Vrsta kabela	Dužina kabela	kg
			standardni	opcija				
BEST BIG 4kW...	\varnothing 8 mm	direktno	vatr. spojnica tipa B	\varnothing 75 mm	ugrađena	4x2,5 mm ²	20 m	50
BEST BIG 5,5kW...		direktno	\varnothing 110 mm	\varnothing 75 mm, G2 1/2	ugrađena	4x2,5 mm ²	20 m	54
BEST BIG 5,5kW (H)...		direktno	vatr. spojnica tipa B	\varnothing 75 mm	ugrađena	4x2,5 mm ²	20 m	54
BEST BIG 7,5kW...		zvijezda-trokut	\varnothing 110 mm	G 4 1/2	nema	7x2,5 mm ²	20 m	70
BEST BIG 10kW...		zvijezda-trokut	\varnothing 150 mm	G 4 1/2	nema	7x2,5 mm ²	20 m	78
BEST BIG 10kW (H)...		zvijezda-trokut	\varnothing 110 mm	G 4 1/2	nema	7x2,5 mm ²	20 m	75