

SERIJE AS-AC-AFV



Dostupne u modelima od 5 - 24 litre s izmjenjivim membranama mogu pružiti dobro rješenje za male vodoopskrbne instalacije, sustave za navodnjavanje, i sve ostale primjene gdje su mali tokovi obavezni. Svi modeli dolaze standardno s EPDM-membranama. CE-certifikat.




Značajke:

- Robusna konstrukcija, visoko kvalitetnog celika, dizajnirana da traje.
- Netoksična EPDM gumena membrana testirana za pitku vodu prema najstrožim normama, s elastičnosti u full-scale ekspanziji spremnika za postizanje visokih performansi te gotovo neograničenog radnog vijeka jedinstvenog dizajna.
- Top-Pro® Epoksi > unutarnja obrada protiv korozije - patentirano od strane proizvođača.
- Kompletно odvojene komore vode i zraka.
- Kompletно odvojena voda od metalnih dijelova spremnika.
- Opremljena izjavom o sukladnosti s bitnim sigurnosnim zahtjevima Direktive 97/23/EC (PED).
- Max. Radna temp: do +99 ° C

Model	Kapacitet litre	Pritisak max. bar	Predtlak bar	Ø1	De mm	L mm	H mm	Dimenzije mm	
AC 5	5	8	-	1.5	3/4"	205	240	-	210 x 210 x 250
AC 8 CE	8	8	-	1.5	3/4"	205	315	-	210 x 210 x 320
AC 18 CE	18	8	-	1.5	3/4" - 1"	270	430	-	280 x 280 x 450
AC 25 CE	24	8	-	1.5	3/4" - 1"	270	470	-	280 x 280 x 470
AFV 24	24	-	16	1.5	3/4" - 1"	270	470	-	280 x 280 x 470
AC 25 GPM CE	24	8	-	1.5	3/4" - 1"	270	470	290	280 x 300 x 470
AS 25 CE	24	8	-	1.5	3/4" - 1"	360	365	-	360 x 360 x 380

1 MPa = 10 bar

AS-AC-AFV

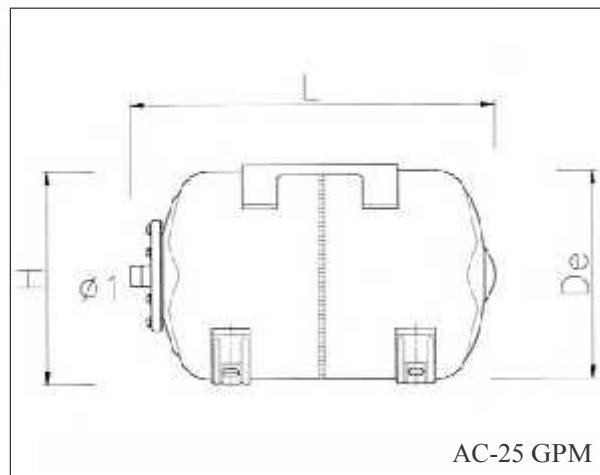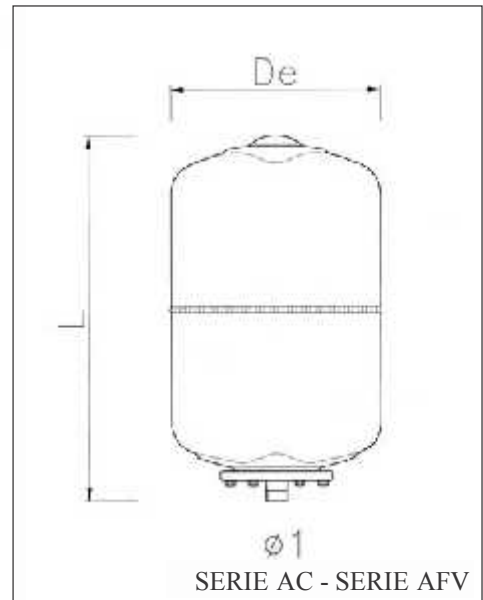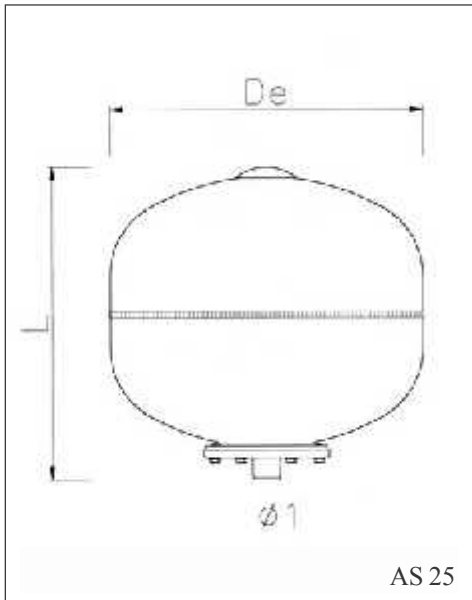

ATESTI :



INGHILTERRA



POLONIA



REP. CECA



REP. SLOVACCA



RUSSIA



UCRAINA



CROAZIA



U.S.A.



U.S.A.



U.S.A.