

### POTOPNE PUMPE ZA OTPADNU VODU KOMPLETNO IZRAĐENE OD INOX-a 316

#### VORTEX ROTOR ANTIBLOCKING SYSTEM



550

80

300



#### RADNE PERFORMANSE

- Temperatura tekućine do 40°C
- Max. dubina potapanja 30 mt.
- Kontinuirani rad

#### MOTOR



- Izolacija klasa F
- IP 68 zaštita
- Termička zaštita
- Suhi tip

#### MATERIALI

- Kučiste
- Gornji poklopac
- Poklopac kučista
- Rotor pumpe (lopatica)
- Kučiste motora
- Osovina sa rotorom
- Dupla mehanička brtva CA/CE (0,8÷1,3 HP)
- SIC/SIC (2÷5,5 HP)
- Duzina kabla

Inox 316  
Inox 316  
Inox 316  
Inox 316  
Inox 316  
Inox 316

10m

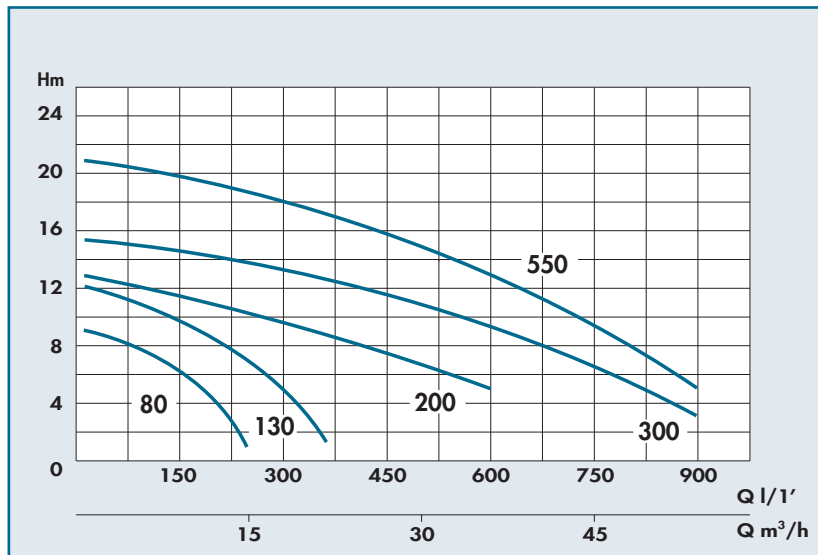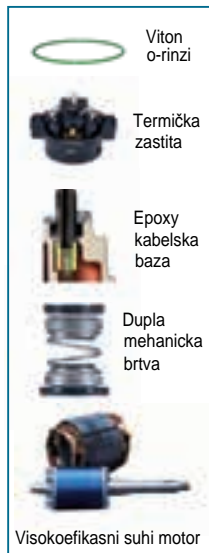

TIP PUMPE		NOMINALNA SNAGA P2		AMPERA		Q = KAPACITET												
Monofazne	Trofazne	HP	kW	Monofazne	Trofazne	m³/h	1,5	3	6	8	9	12	24	36	48	54	IZLAZ IZ PUMPE	
230V-50Hz	230/400V-50Hz			1 x 230V	3 x 400V	l/min	25	50	100	133	150	200	400	600	800	900		
<b>SAM 316-80</b>	<b>SA 316-80</b>	0,8	0,6	3	1	Visina dobave (pumpanja) u metrima											2"	
<b>SAM 316-130</b>	<b>SA 316-130</b>	1,3	0,95	4,8	1,9	H (m)	9,2	8,5	7,3	6,3	6,1	5					2"	
	<b>SA 316-200</b>	2	1,5		3,5		12,5	11,9	11,4	11,1	10,9	10,5	9	5,4				3"
	<b>SA 316-300</b>	3	2,2		5,5		15,7	15,4	15	14,6	14,4	14,2	13	9	5	3		3"
	<b>SA 316-550</b>	5,5	4		12,2		21,0	20,5	20	19,8	19,6	19	16,8	13,8	8	5		3"

