

APLIKACIJE

Univerzalne pumpe za privatne ili opće vodoopskrbne sustave, za čiste ne-eksplozivne tekućine bez čvrstih ili abrazivnih sastojaka, za poljoprivredna navodnjavanja i sportske programe, za civilne i industrijske svrhe, za sisteme u kotlovnica i sustavima kondenzata, u visokotlačnim postrojenjima autopraonica i dr.

TEHN. KARAKTERISTIKE


- Temp. tekućine od 0 °C do 110 °C
- Temp. okoline do 40 °C
- Max. radni tlak 25 bara

MOTOR

- El. standardni (n= 2900 o/min)
- Klasa izolacije F
- Zaštita IP 55


MATERIJALI

Ušisno kućište : inox
Tlačno kućište : inox
Rotor pumpe (lopatica) : inox
Difuzor : inox
Plašt : inox
Osovina : inox
Prirubnice : inox
Mehanička brtva: silicij / grafit

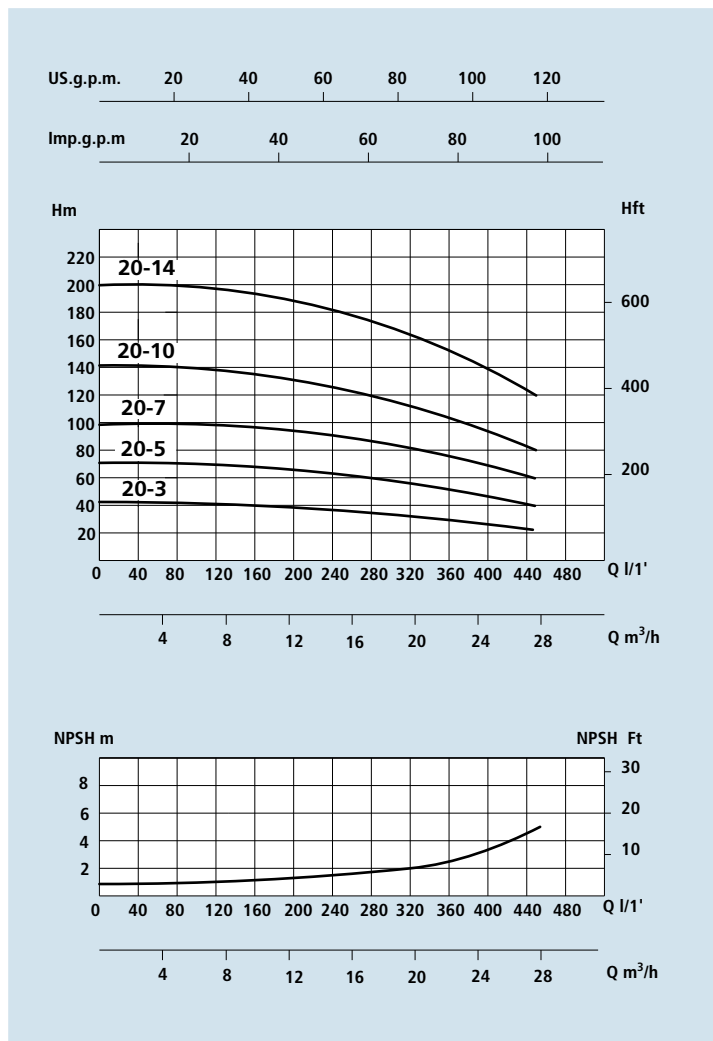


PERFORMANCE

TIP PUMPE	SNAGA NOMINALNA		AMPERA	Q = KAPACITET (PROTOK)									
				m³/h	10	12	14	16	20	22	24	26	28
Trofazne	P2		Trofazne	lt/1'	166	200	233	266	333	366	400	433	466
230/400V-50Hz	HP	kW	3 x 400V	Visina dobave u metrima									
VS 20-3	5,5	4	7,6	H (m)	41	40	39	38	35	33	30	27	24
VS 20-5	7,5	5,5	10,3		67	66	64	62	58	55	50	45	40
VS 20-7	10	7,5	13,5		95	93	91	89	82	77	71	65	58
VS 20-10	15	11	20		136	134	131	128	118	111	103	95	85
VS 20-14	20	15	26,5		192	189	185	180	166	156	145	133	119

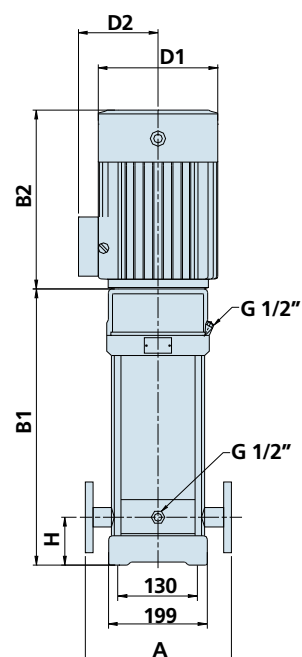

DN 50 2"

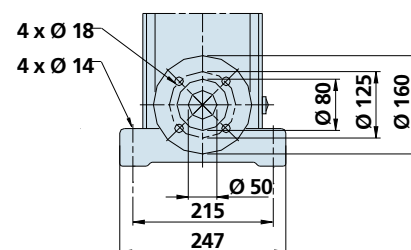

TIP PUMPE	DIMENZIJE mm								DIMENZIJE mm			MASA Kg
	A	H	B1	B2	B1 + B2	D1	D2	Prirubnica	P	L	H	
Trofazne												
VS 20-3	300	90	452	335	787	230	188	DN 50 2"	300	810	300	57 -
VS 20-5	300	90	562	430	992	260	208	DN 50 2"	300	1020	300	74 -
VS 20-7	300	90	652	430	1082	260	208	DN 50 2"	300	1150	300	84 -
VS 20-10	300	90	875	490	1365	330	255	DN 50 2"	300	1390	300	145 -
VS 20-14	300	90	1055	490	1545	330	255	DN 50 2"	300	1570	300	165 -