

3''

POTOPNE INOX PUMPE SA VELIKOM BRZINOM OKRETAJA ,
MEKIM UPUŠTANJEM TE SVIM ZAŠTITAMA PROMJERA 80,5 mm



80,5 mm

NAJČEŠĆA UPOTREBA

- Hidroforski sistemi za kućnu vodoopskrbu
- Navodnjavanja u vrtovima te poljoprivredi
- Punjenje rezervara iz bunara te bušotina
- Hortikultura
- Protupožarne sustave
- Industrijske potrebe
- Fontane
- Općenito za povišenje tlaka

GLAVNE KARAKTERISTIKE

- ✓ NAPAJANJE MONOFAZNO 230 V
- ✓ JEDNOSTAVNE ZA RUKOVANJE I INSTALALIRANJE
- ✓ KOMPAKTNE I ROBUSTNE KONSTRUKCIJE
- ✓ VISOKA EFIKASNOST PUMPE I MOTORA
- ✓ UŠTEDA ENERGIJE
- ✓ BROJ UKLOPA NA SAT: BEZ LIMITA
- ✓ IP 68 STUPANJ ZAŠTITE
- ✓ MEKI START - UPUŠTANJE (ZALET)
- ✓ MAX. POTAPANJE U VODU : 150 m
- ✓ MAX. TEMPERATURA VODE : 35 st.C
- ✓ MAX. UDIO PIJESKA : 250 g/m³
- ✓ 8400 o/min VELIKA BRZINA VRTNJE
- ✓ KONTINUIRANI NEPREKIDNI RAD S1
- ✓ IZNIMNO TIHE U RADU
- ✓ INSTALIRAN NEPOVRATNI VENTIL
- ✓ STANDARDNA ISPORUKA S 1,8 m KABLA
- ✓ SADRŽI KOMPLETNU ZAŠTITU :
PREKOSTRUJNA ZAŠTITA
ZAŠTITA OD RADA NA SUHO
ZAŠTITA OD PREGRIJAVANJA
ZAŠTITA OD BLOKIRANJA
PODNAPON / PRENAPON
ZAŠTITA OD UDARA GROMA

JEDNOSTAVNO NAJBOLJE



Simply the BEST

Professional



Vaš život , naša kvaliteta , diljem svijeta

GLAVNE PERFORMANSE SVIH MODELA

TIP PUMPE		Motor		PROTOK Q (m ³ /h - l/min)											
				l/min	0	10	20	30	40	50	60	80	100	115	125
				m ³ /h	0,0	0,6	1,2	1,8	2,4	3,0	3,6	4,8	6,0	6,9	7,5
		kW	HP	VISINA DOBAVE u metrima H (m)											
3TP2	4	0,60	0,8		61	58	51	44	36	27	18	-	-	-	-
3TP2	6	0,90	1,2		97	92	82	70	57	43	28	-	-	-	-
3TP3	3	0,60	0,8		49	-	44	40	35	30	25	13	-	-	-
3TP3	5	0,90	1,2		84	-	74	68	60	52	43	23	-	-	-
3TP5	4	0,90	1,2		53	-	51	49	47	45	41	34	24	16	12


TIP PUMPE		Motor		PROTOK Q (m ³ /h - l/min)											
				l/min	0	10	20	30	40	50	60	80	100	115	125
				m ³ /h	0,0	0,6	1,2	1,8	2,4	3,0	3,6	4,8	6,0	6,9	7,5
		kW	HP	VISINA DOBAVE u metrima H (m)											
3TP2	4 PFC	0,60	0,8		71	68	61	54	45	36	26	-	-	-	-
3TP2	6 PFC	0,90	1,2		106	102	92	80	66	52	36	-	-	-	-
3TP2	9 PFC	1,50	2,0		158	152	137	118	96	77	54	-	-	-	-
3TP3	3 PFC	0,60	0,8		55	-	51	46	42	36	31	19	-	-	-
3TP3	5 PFC	0,90	1,2		91	-	84	76	69	61	52	31	-	-	-
3TP3	8 PFC	1,50	2,0		146	-	134	122	111	97	83	50	-	-	-
3TP5	4 PFC	0,90	1,2		56	-	54	53	51	49	46	38	27	19	13
3TP5	7 PFC	1,50	2,0		96	-	93	91	88	84	79	66	48	32	22

*** Napomena 10 m = 1 bar

OSTALE TEHNIČKE KARAKTERISTIKE

TIP PUMPE	SNAGA STRUJA		MASA IZLAZ		DIMENZIJE		
	kW	A	KG	Priključak unutarnji navoj	A* [mm]	H2 [mm]	H [mm]
3TP2-4	0,6	8,6	9,0	G 1	80	661	916
3TP2-4 PFC	0,6	5,9	10,4	G 1	80	785	1040
3TP2-6	0,9	10,2	9,6	G 1	80	691	995
3TP2-6 PFC	0,9	7,2	11,1	G 1	80	815	1119
3TP2-9 PFC	1,5	11,4	12,1	G 1	80	845	1222
3TP3-3	0,6	8,6	8,8	G 1	80	661	891
3TP3-3 PFC	0,6	5,9	10,1	G 1	80	785	1015
3TP3-5	0,9	10,2	9,7	G 1	80	691	970
3TP3-5 PFC	0,9	7,2	11,0	G 1	80	815	1094
3TP3-8 PFC	1,5	11,4	12,0	G 1	80	845	1198
3TP5-4	0,9	10,2	9,7	G 1 1/4	80	691	968
3TP5-4 PFC	0,9	7,2	11,0	G 1 1/4	80	815	1092
3TP5-7 PFC	1,5	11,4	12,0	G 1 1/4	80	845	1212


DIMENZIJE PUMPI

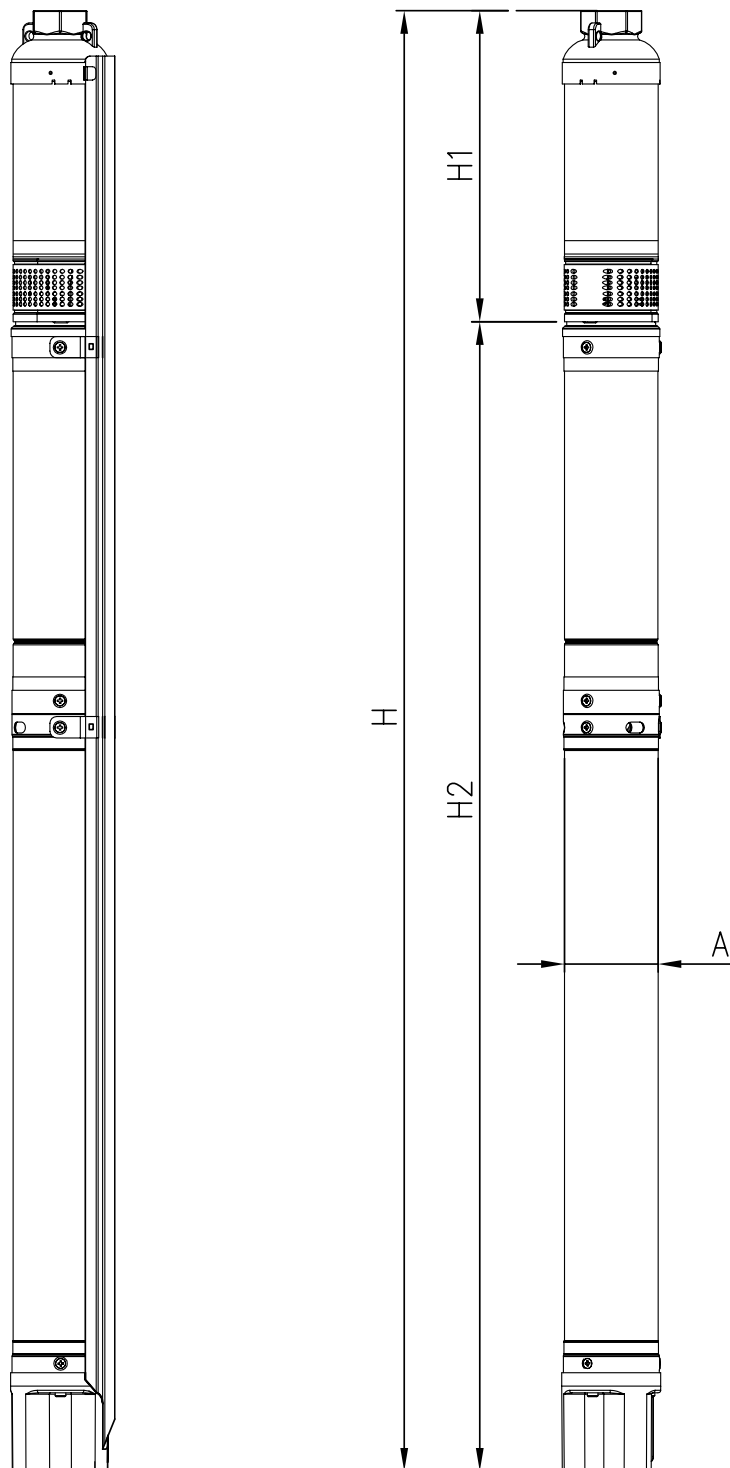

DNM= PRIKLJUČAK NA IZLAZU PUMPE

DNM 1" 3TP2-3
DNM 1"1/4 3TP5

ø80.5-max

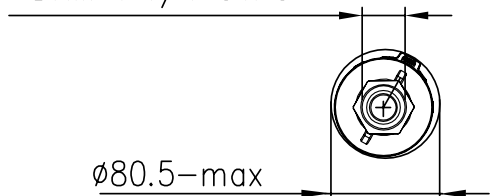

TABLICA ZA ODABIR ODGOVARAJUĆEG PRESJEKA KOD PRODULJENJA KABLA

SNAGA		PRESJEK I MAX. DUŽINA KABLA (*)			
kW	HP	3x1,5mm ²	3x2,5mm ²	3x4mm ²	3x6mm ²
0,6	0,8	70	120	180	270
0,9	1,2	60	85	125	190
1,5	2,0	55	75	90	140

Aplikacije



EBARA



EBARA CORPORATION JE VODEĆI SVIJETSKI PROIZVOĐAČ PUMPI



Principal EBARA Group Companies in the world

Ebara Corporation - Japan
(45 Companies)



Vaš život , naša kvaliteta , diljem svijeta



HIDRO-METAL >>> OVLAŠTENI PREDSTAVNIK, DISTRIBUTER TE SERVISER ZA HRVATSKU