

Professional



TEHNIČKE KARAKTERISTIKE


- Max. temperatura pumpanog medija 40°C
- Zaštita motora IP68
- Izolacija: Class F
- Sa plovkom

MATERIJALI IZRADE INOX PUMPE

- Tijelo pumpe: INOX 304
- Kućište motora: INOX 304
- Dupla mehanička brtva unutar komore
- Osovina : INOX 430
- Rotor pumpe : Noril (zatvorenog tipa)

UPOTREBA

- Pumpanje čiste te lagano zamuljene drenažne vode

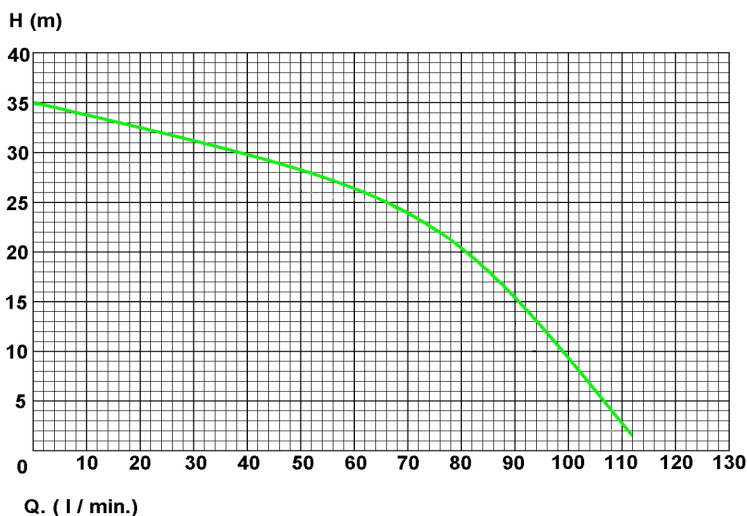

Vaš život , naša kvaliteta , diljem svijeta



PERFORMANSE

RPM 2900 - HZ 50

TIP	SNAGA		JEDNOFAZNA	A	PROTOK													MAX. VELIČINA ČESTICA	IZLAZ	KABEL H07-RN	KG		
					VISINA DOBAVE u metrima																		
					m³/h	0	0,75	1,5	2,25	3	3,75	4,5	5,25	6	6,75	7,5	l/min					0	12,5
AQUAGIO 100M	1	0,8	220 V.	4	H m	35	33	32	30	28	26	22	17	9	2	mm. 2 x 2	1" (25mm)	m. 10	10				