




Code 101274410

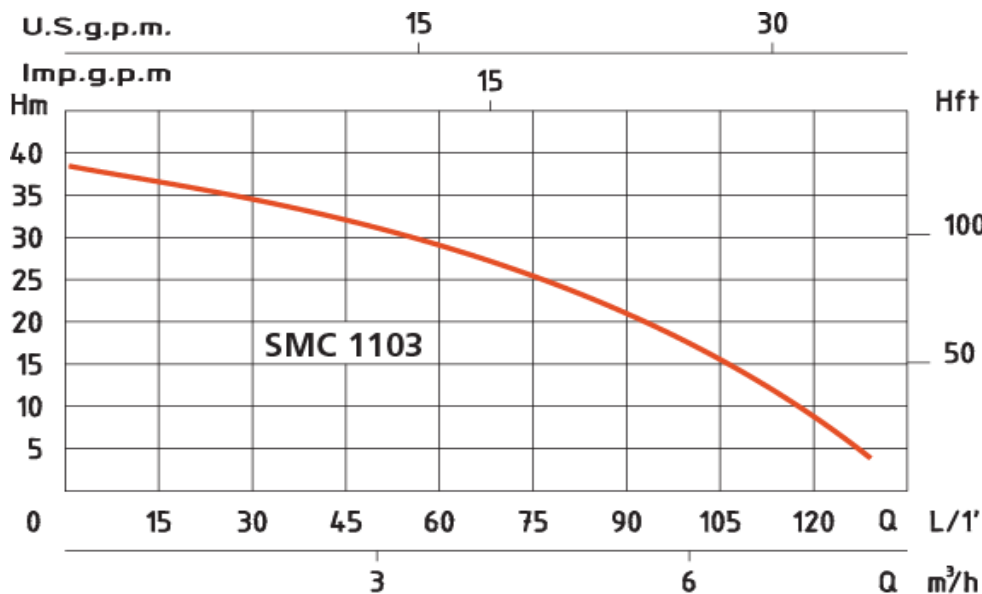

Motor 230V

Broj polova/okretaji	2 Polni 2800 min ⁻¹
Broj faza	Jednofazna
Vrsta rada	Kontinuirani - S1
Stupanj zaštite	IP68
Klasa izolacije	F
Napon	230 Volt 50 Hz
Struja	5 Ampera
Ulazna snaga P1	1100 Watt
Kondenzator	20 µF
Max. temperatura vode	40 °C
Ulazna veličina čestica na usisnom situ	3 mm
Max. udio pijeska u vodi	40 gr/m3

Radne karakteristike

Max. dubina uranjanja ispod razine vode 8 m

Min. usisni nivo 60 mm

Dimenzije

Promjer mm Ø158

Visina (H) mm 330

Neto masa kg 11,8

Pribor uz pumpu : UŽE

Kvaliteta



Pumpa

Centrifugalna potopna višestepena

Priključak > unutarnji navoj	1"
Max. visina dizanja	38 m
Max. kapacitet	130 l/min
Broj rotora	3
Materiali izrade	
Ručka za nošenje	Nylon PA6+GF20
Tijelo pumpe	Inox 304
Difuzor	Noryl PPO+GF20
Rotori	Noryl PPO-GF
Kučiste motora	Antikorozijski aluminij 6063A
Osovina sa rotorom	Inox 304
Kučiste pumpe	Inox 304
Brtvljenje	Dvostruka mehanička brtva
Kabel	H07 RNF 3x1 10 metara sa utikačem
Namjena	Pumpanje čiste te lagano zamuljene vode

