





**EBARA**  
Pumps Corporation


## **BH(Q)** Potopne pumpe

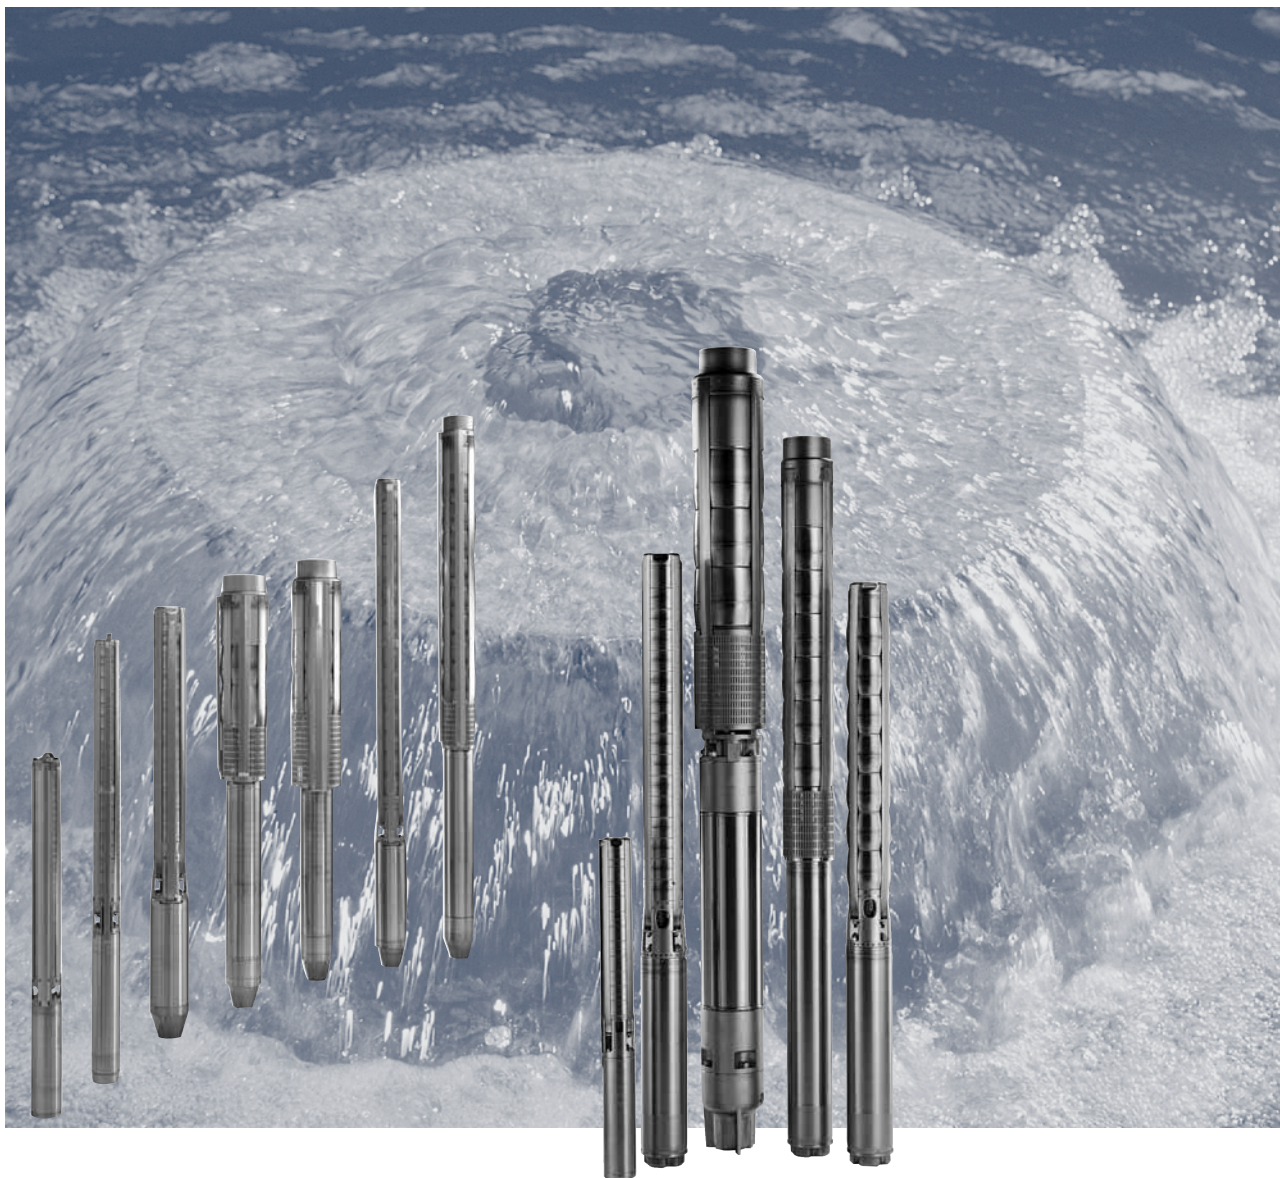



**HIDRO-METAL**  
ovlašteni predstavnik te distributer za Hrvatsku

## BHQ 77

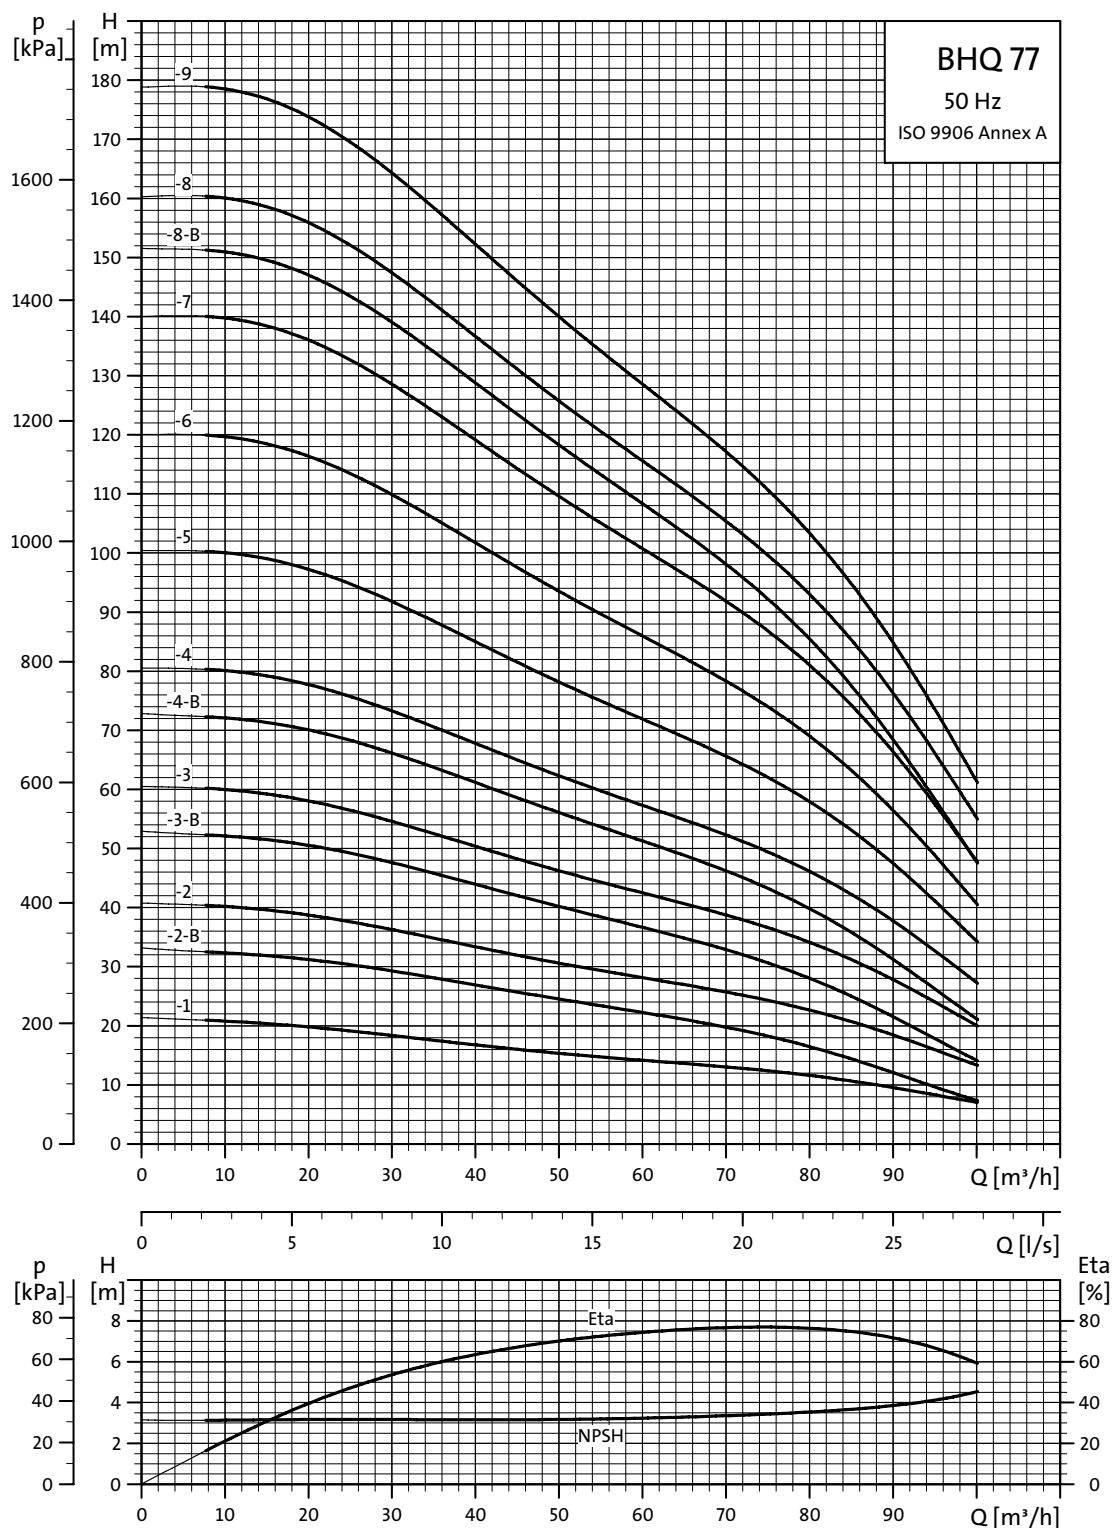

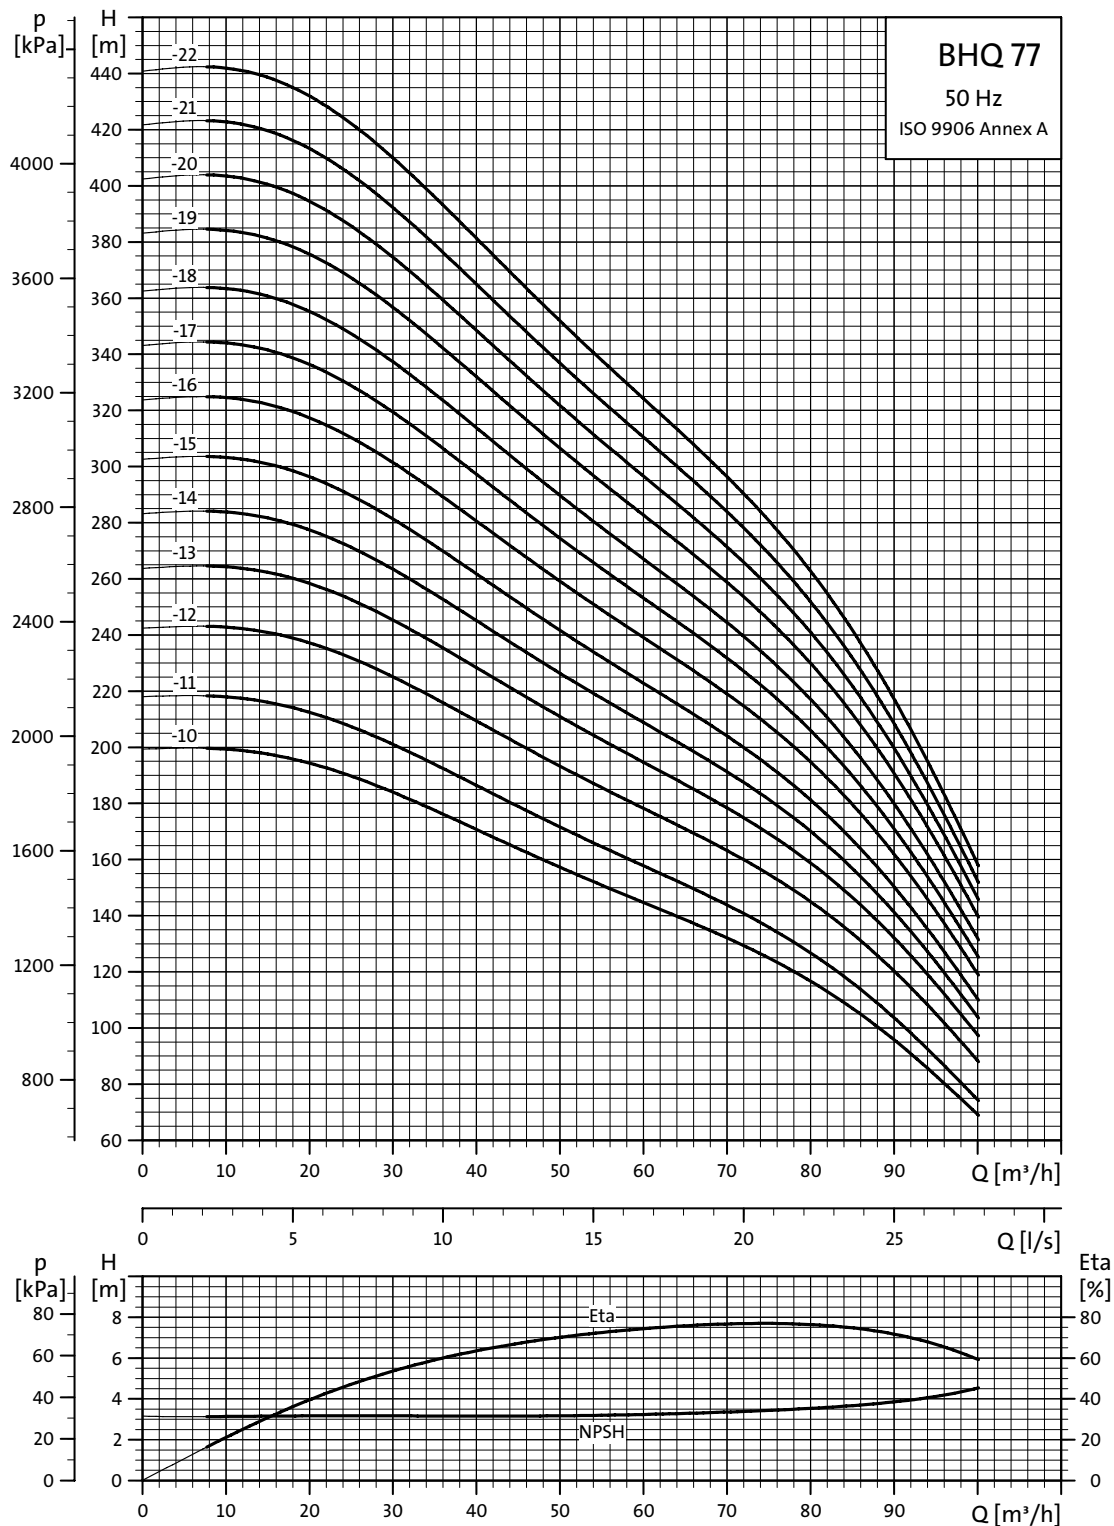


## Dimenzije i težine

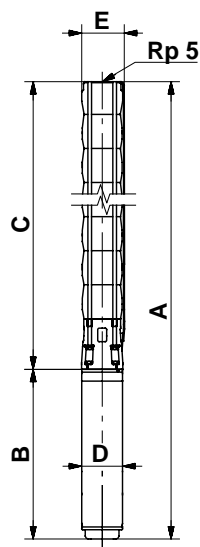


Tip crpke	Motor		Dimenzije [mm]								Neto težina [kg]		
	Tip	Snaga [kW]	Rp 5 priključak				5" prirubnica					B	D
			A	C	E*	E**	A	C	E*	E**			
BH 77-1	MS6	5,5	1153	618	178	186	1153	618	200	200	535	143	55
BH 77-2-B	MS6	5,5	1281	746	178	186	1281	746	200	200	535	143	59
BH 77-2	MS6	7,5	1311	746	178	186	1311	746	200	200	565	143	63
BH 77-3-B	MS6	9,2	1464	874	178	186	1464	874	200	200	590	143	72
BH 77-3	MS6	11	1557	874	178	186	1557	874	200	200	683	143	75
BH 77-4-B	MS6	13	1711	1003	178	186	1711	1003	200	200	708	143	82
BH 77-4	MS6	15	1741	1003	178	186	1741	1003	200	200	738	143	86
BH 77-5	MS6	18,5	1914	1131	178	186	1914	1131	200	200	783	143	95
BH 77-6	MS6	22	2097	1259	178	186	2097	1259	200	200	838	143	105
BH 77-7	MS6	26	2290	1387	178	186	2290	1387	200	200	903	143	114
BH 77-8-B	MS6	26	2418	1515	178	186	2418	1515	200	200	903	143	118
BH 77-8	MS6	30	2483	1515	178	186	2483	1515	200	200	968	143	126
BH 77-9	MS6	30	2611	1643	178	186	2611	1643	200	200	968	143	129
BH 77-10	MMS 6000	37	3196	1771	178	186	3196	1771	200	200	1425	144	181
BH 77-11	MMS 6000	37	3339	1898	178	186	3323	1898	200	200	1425	144	184
BH 77-12	MMS 8000	45	3313	2043	200	204	3313	2043	209	209	1270	192	240
BH 77-13	MMS 8000	55	3522	2172	200	204	3522	2172	209	209	1350	192	259
BH 77-14	MMS 8000	55	3650	2300	200	204	3650	2300	209	209	1350	192	263
BH 77-15	MMS 8000	55	3779	2429	200	204					1350	192	266
BH 77-16	MMS 8000	63	4047	2557	200	204					1490	192	296
BH 77-17	MMS 8000	63	4175	2685	200	204					1490	192	300
BH 77-18	MMS 8000	63	4304	2814	200	204					1490	192	304
BH 77-19	MMS 8000	75	4826	3236	200	204					1590	192	334
BH 77-20	MMS 8000	75	4954	3364	200	204					1590	192	338
BH 77-21	MMS 8000	75	5082	3492	200	202					1590	192	342
BH 77-22	MMS 8000	92	5450	3620	200	202					1830	192	391


\* Makimalni promjer crpke s jednim motorskim kabelom.


\*\* Makimalni promjer crpke s dva motorska kabela.

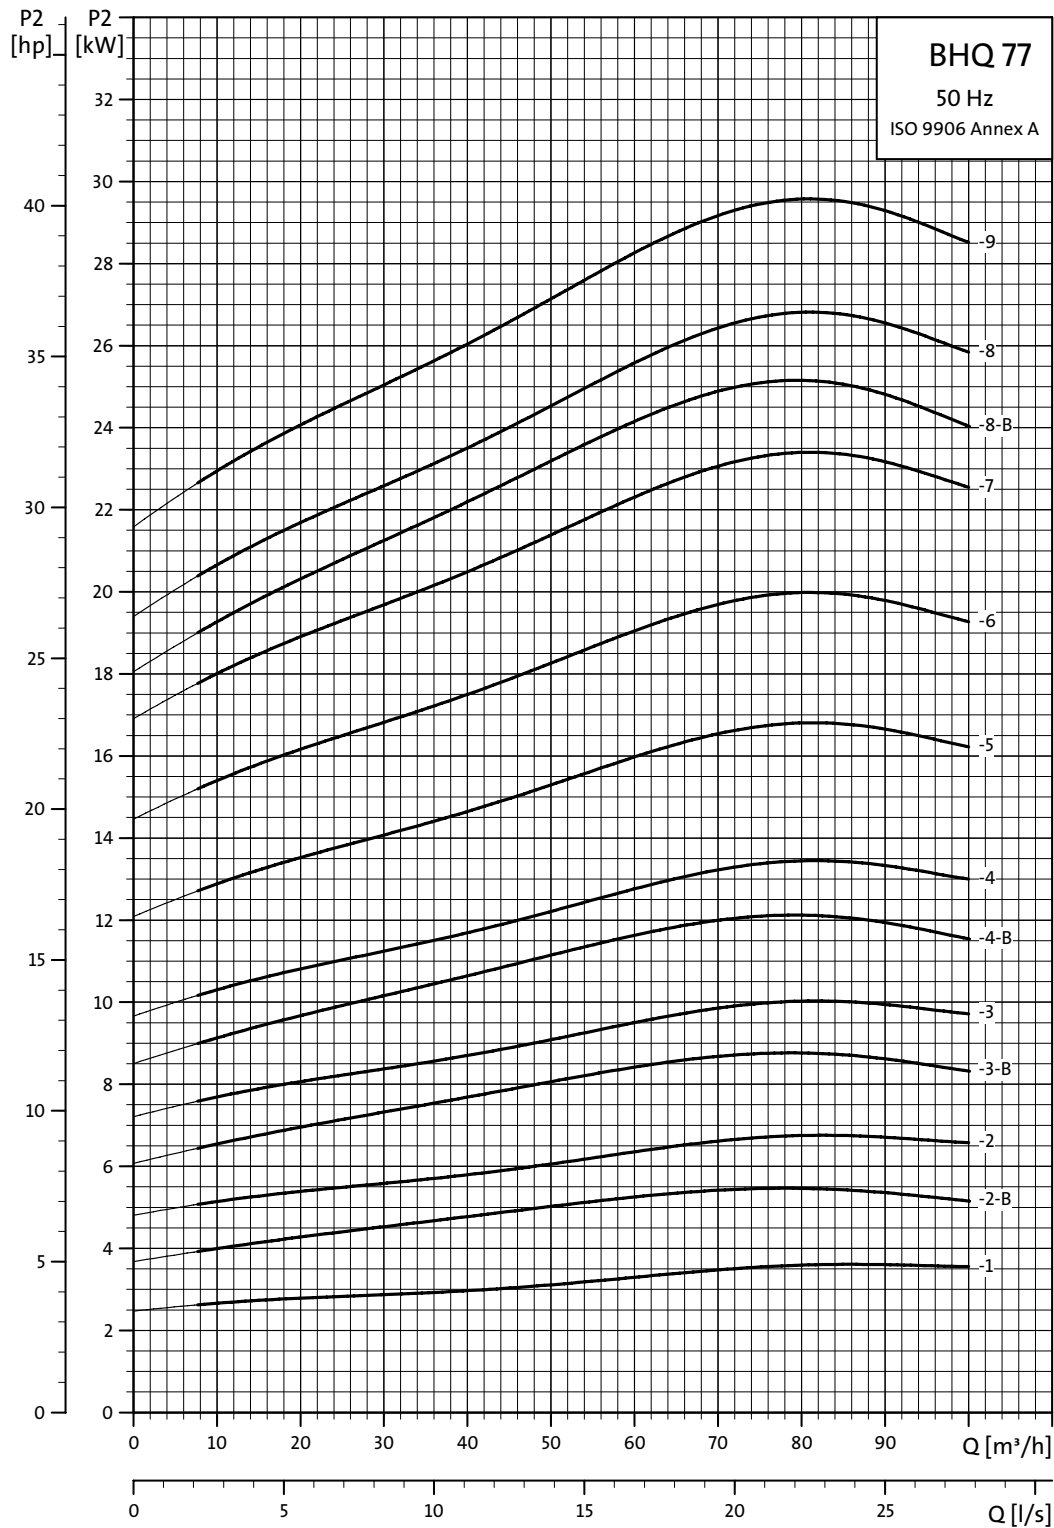


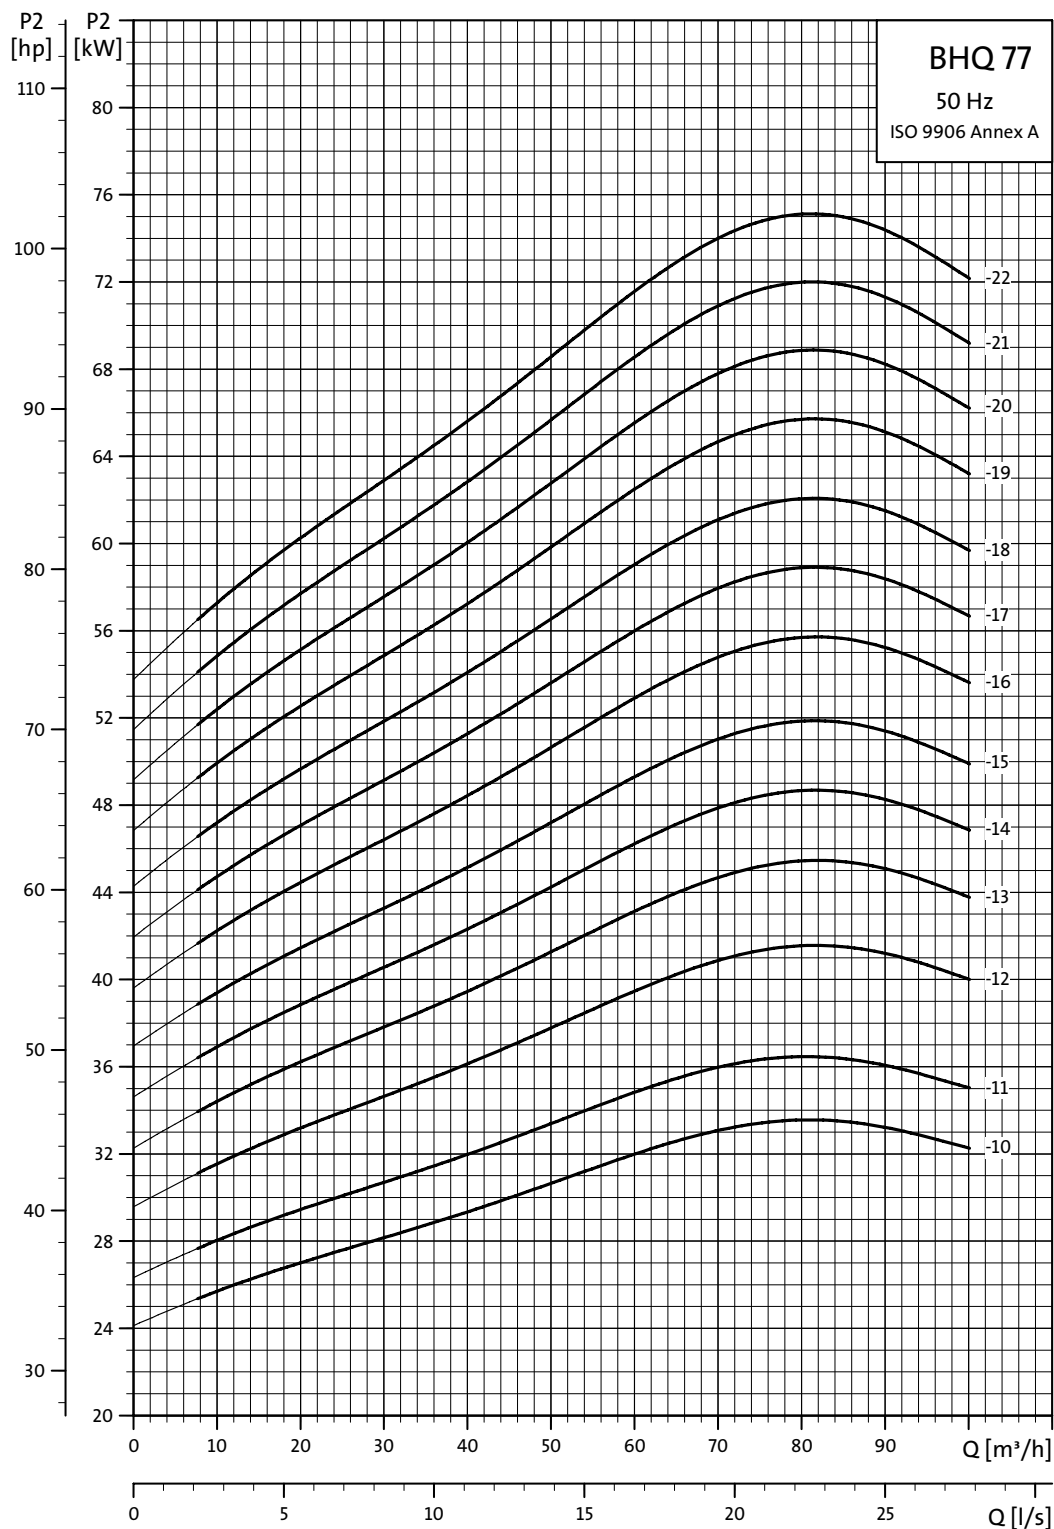


## BHQ 95

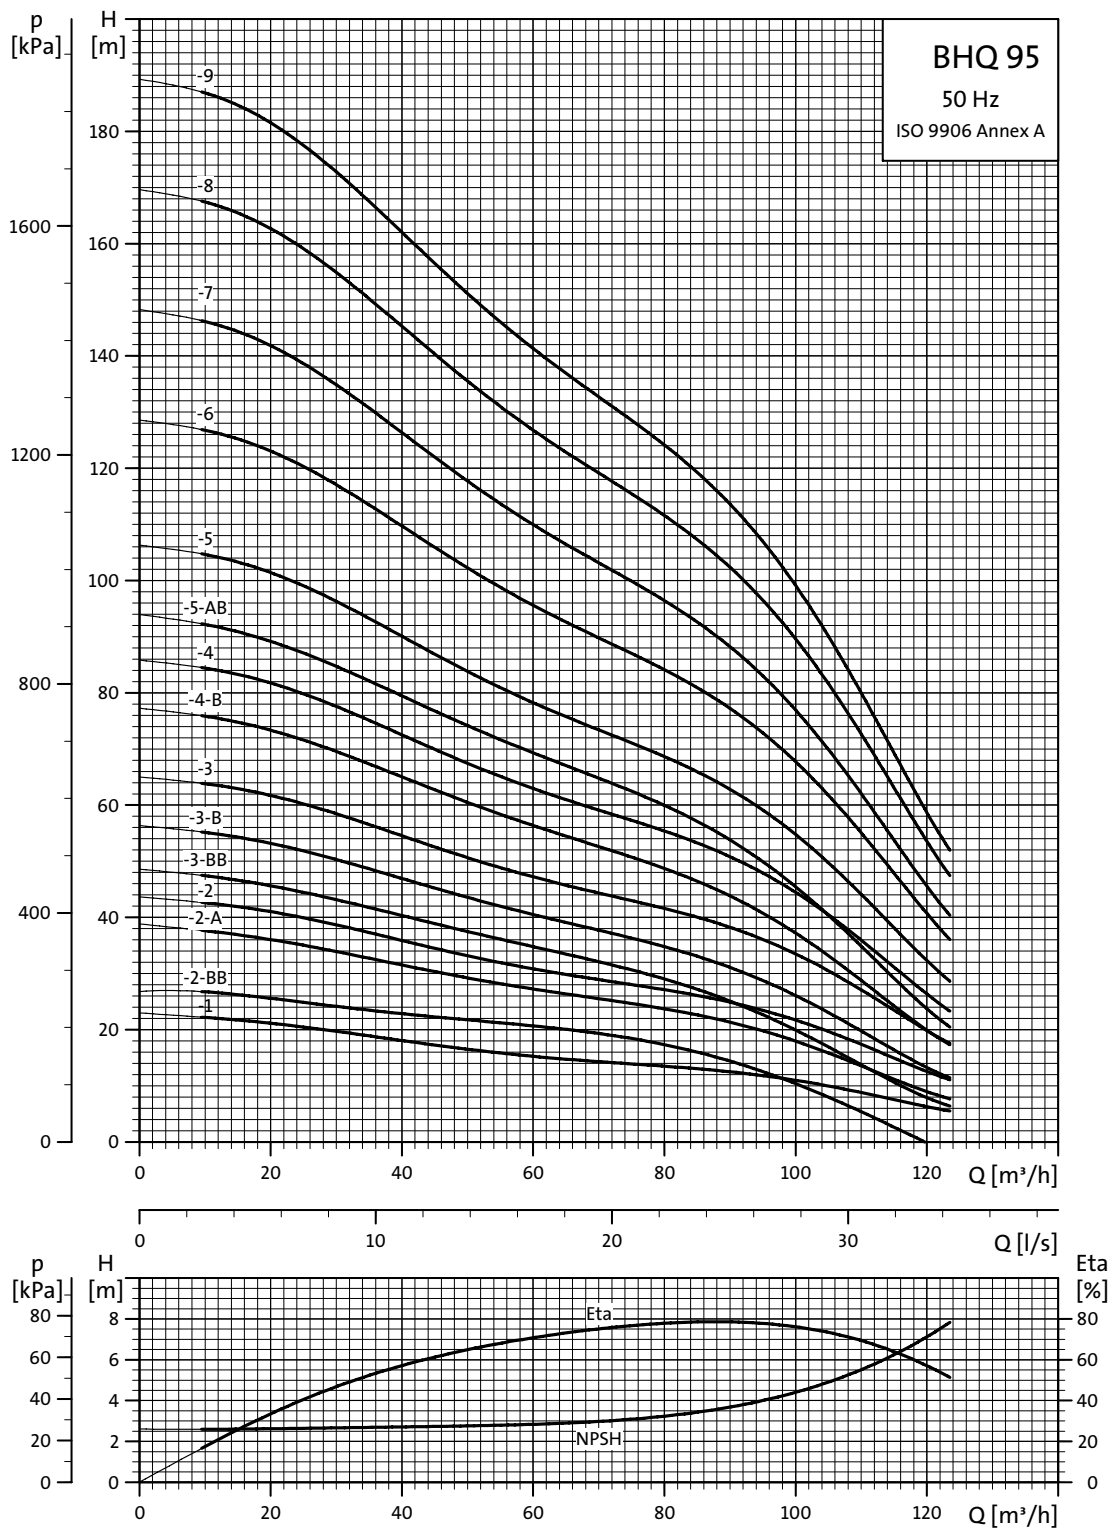

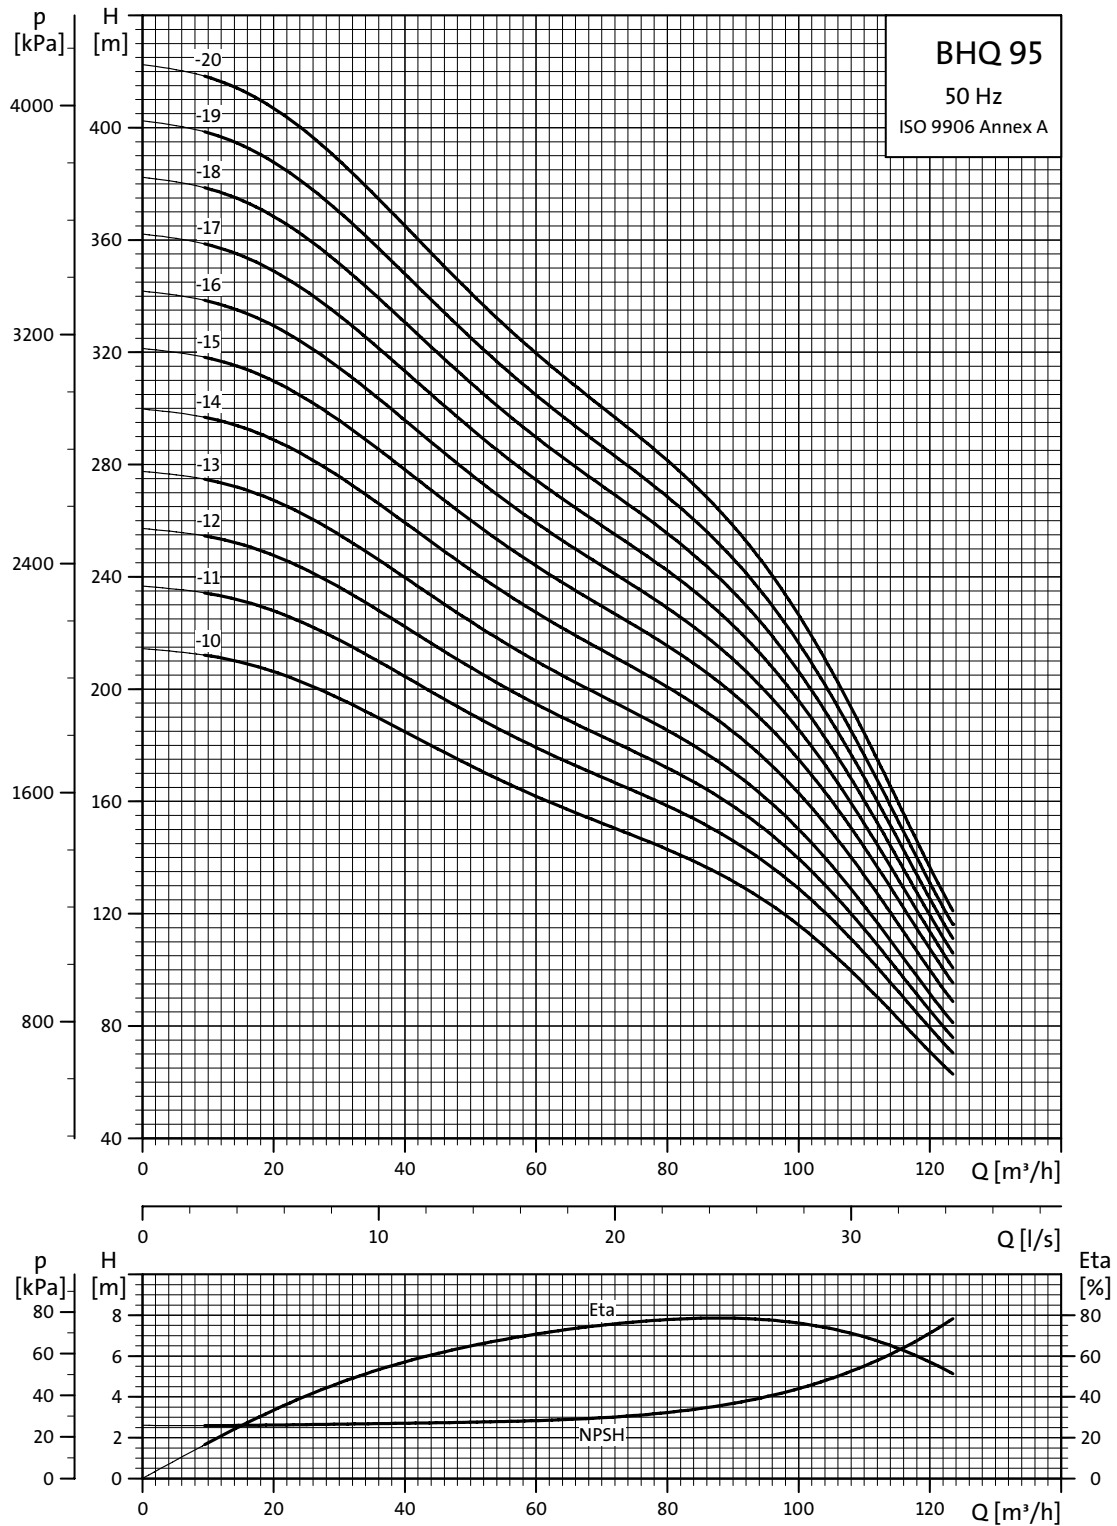


## Dimenzije i težine

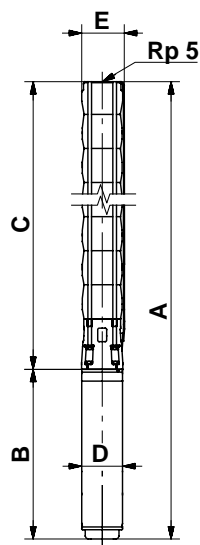


Tip crpke	Motor		Dimenzije [mm]										Neto težina [kg]
	Tip	Snaga [kW]	Rp 5 priključak				5" prirubnica				B	D	
			A	C	E*	E**	A	C	E*	E**			
BH 95-1	MS6	5,5	1153	618	178	186	1153	618	200	200	535	143	55
BH 95-2-BB	MS6	5,5	1281	746	178	186	1281	746	200	200	535	143	72
BH 95-2-A	MS6	7,5	1311	746	178	186	1311	746	200	200	565	143	63
BH 95-2	MS6	9,2	1336	746	178	186	1336	746	200	200	590	143	68
BH 95-3-BB	MS6	9,2	1464	874	178	186	1464	874	200	200	590	143	72
BH 95-3-B	MS6	11	1557	874	178	186	1557	874	200	200	683	143	75
BH 95-3	MS6	13	1582	874	178	186	1582	874	200	200	708	143	78
BH 95-4-B	MS6	15	1741	1003	178	186	1741	1003	200	200	738	143	86
BH 95-4	MS6	18,5	1786	1003	178	186	1786	1003	200	200	783	143	91
BH 95-5-AB	MS6	18,5	1914	1131	178	186	1914	1131	200	200	783	143	95
BH 95-5	MS6	22	1969	1131	178	186	1969	1131	200	200	838	143	101
BH 95-6	MS6	26	2162	1259	178	186	2162	1259	200	200	903	143	110
BH 95-7	MS6	30	2355	1387	178	186	2355	1387	200	200	968	143	122
BH 95-8	MMS 6000	37	2940	1515	178	186	2940	1515	200	200	1425	144	173
BH 95-9	MMS 6000	37	3067	1642	178	186	3067	1642	200	200	1425	144	177
BH 95-10	MMS 8000	45	3055	1785	196	204	3055	1785	205	205	1270	192	233
BH 95-11	MMS 8000	55	3264	1914	196	204	3264	1914	205	205	1350	192	251
BH 95-12	MMS 8000	55	3393	2043	196	204	3393	2043	205	205	1350	192	255
BH 95-13	MMS 8000	55	3522	2172	196	204	3522	2172	205	205	1350	192	259
BH 95-14	MMS 8000	63	3790	2300	196	204	3790	2300	205	205	1490	192	289
BH 95-15	MMS 8000	75	4019	2429	196	204					1590	192	311
BH 95-16	MMS 8000	75	4147	2557	196	204					1590	192	315
BH 95-17	MMS 8000	75	4275	2685	196	204					1590	192	319
BH 95-18	MMS 8000	92	4938	3108	196	204					1830	192	376
BH 95-19	MMS 8000	92	5066	3236	196	204					1830	192	380
BH 95-20	MMS 8000	92	5194	3364	196	204					1830	192	384


\* Makimalni promjer crpke s jednim motorskim kabelom.


\*\* Makimalni promjer crpke s dva motorska kabela.

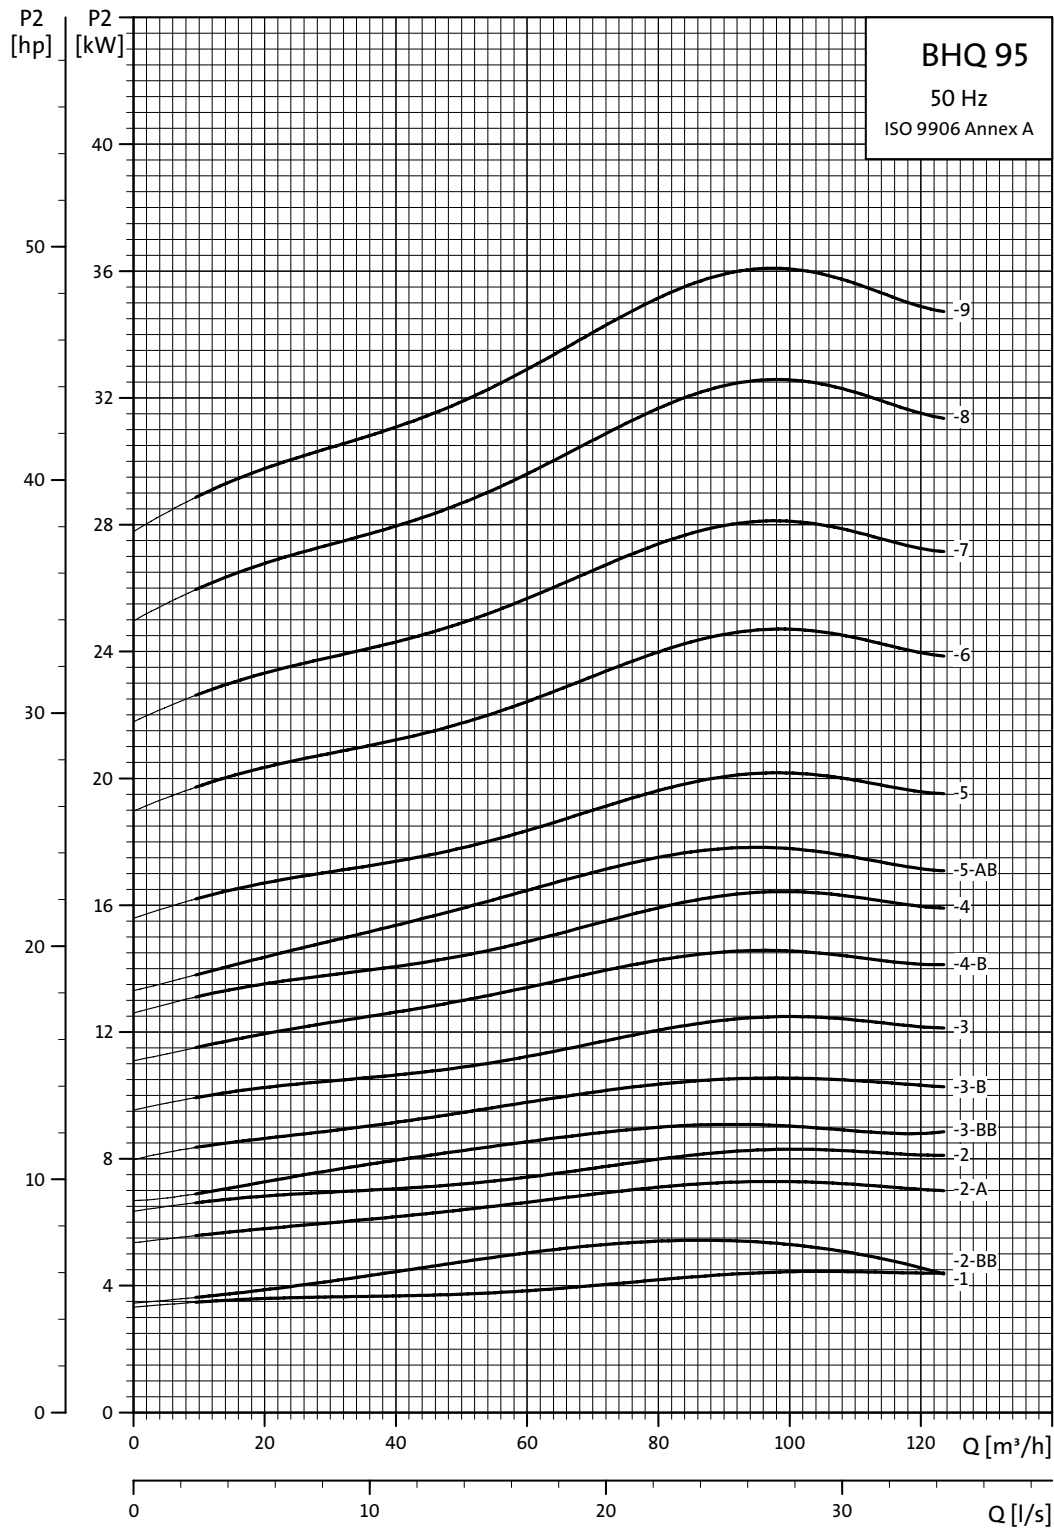


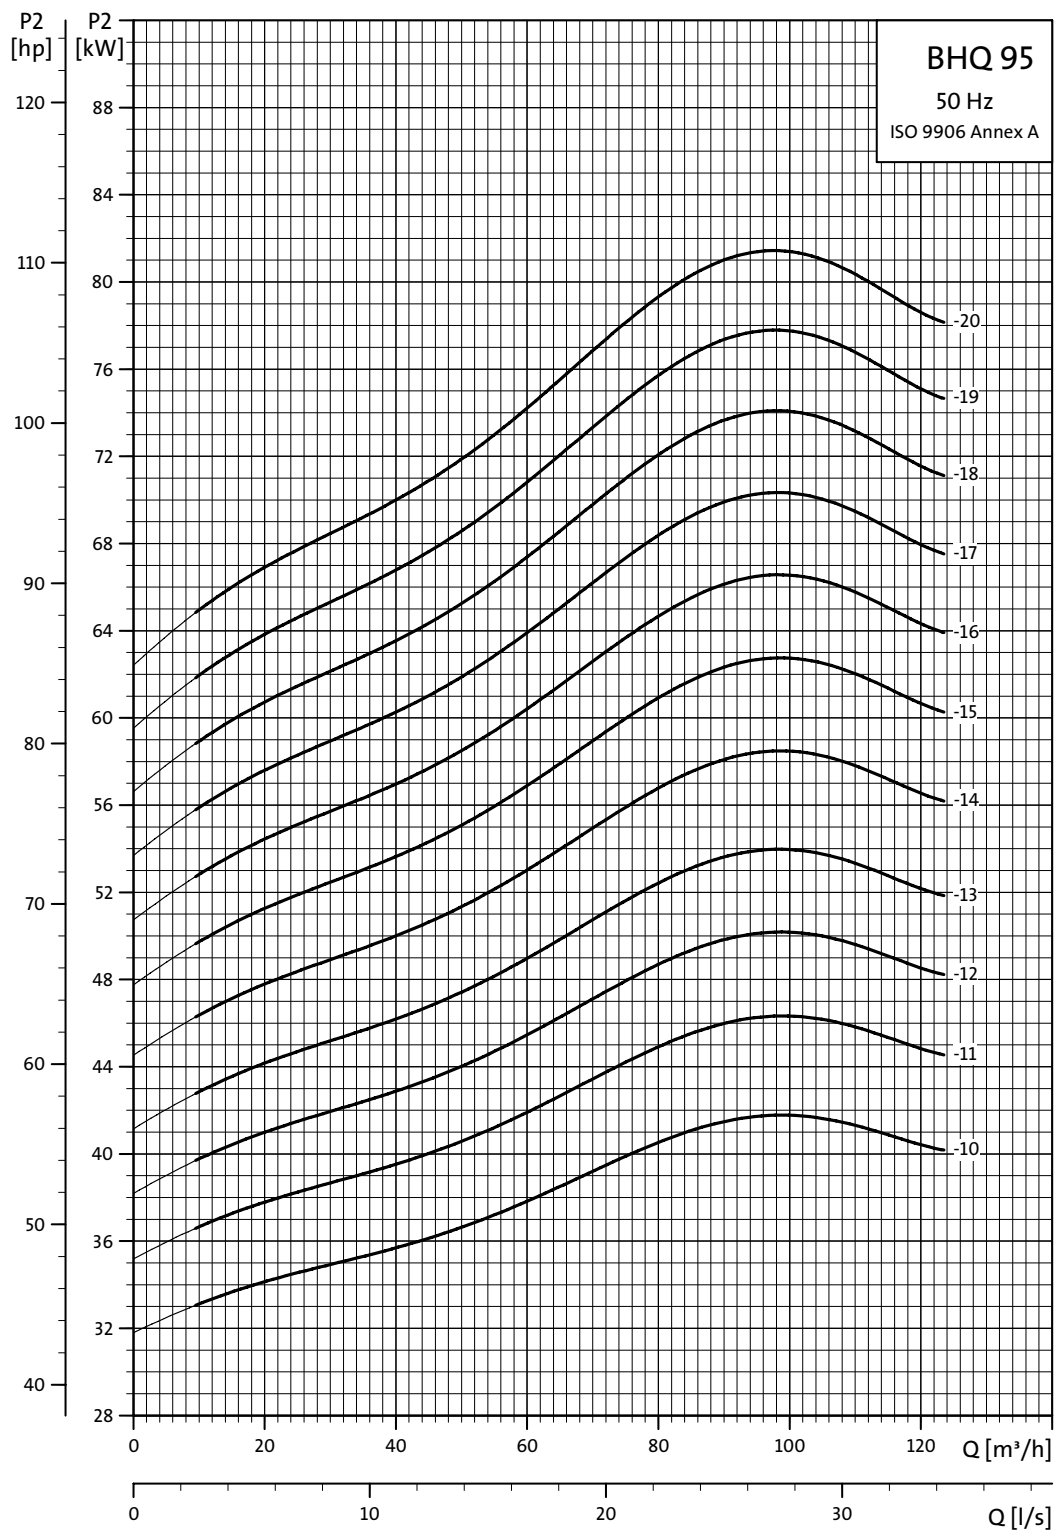


## BHQ 125

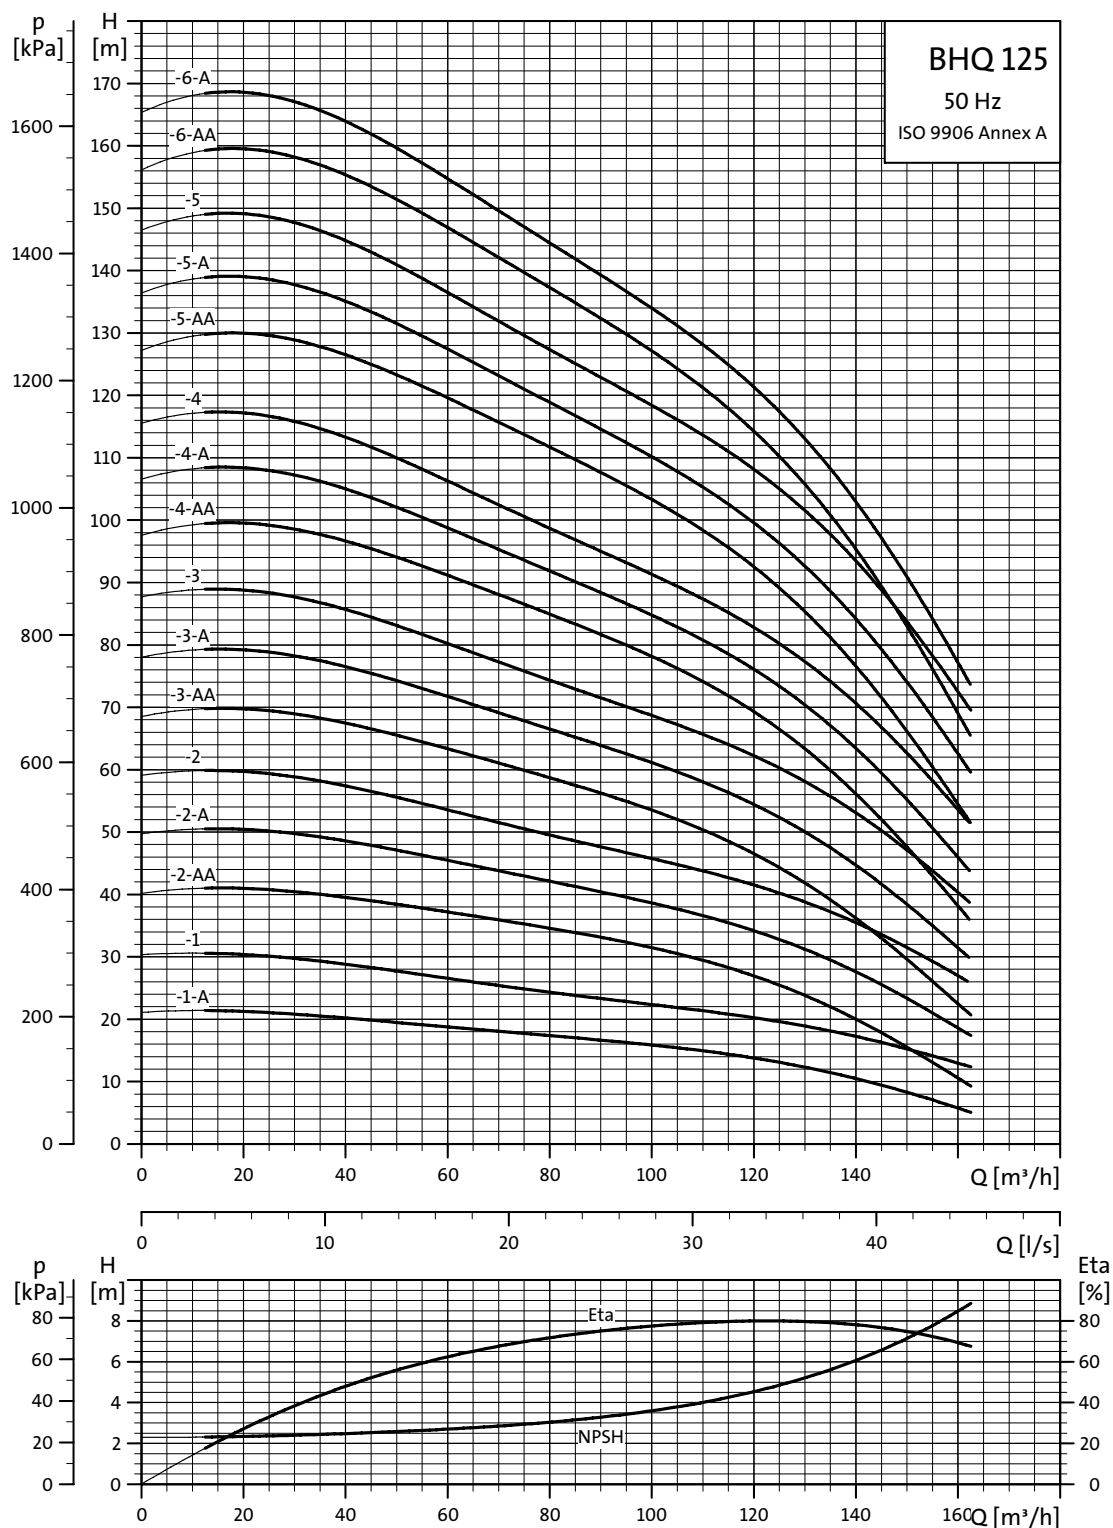

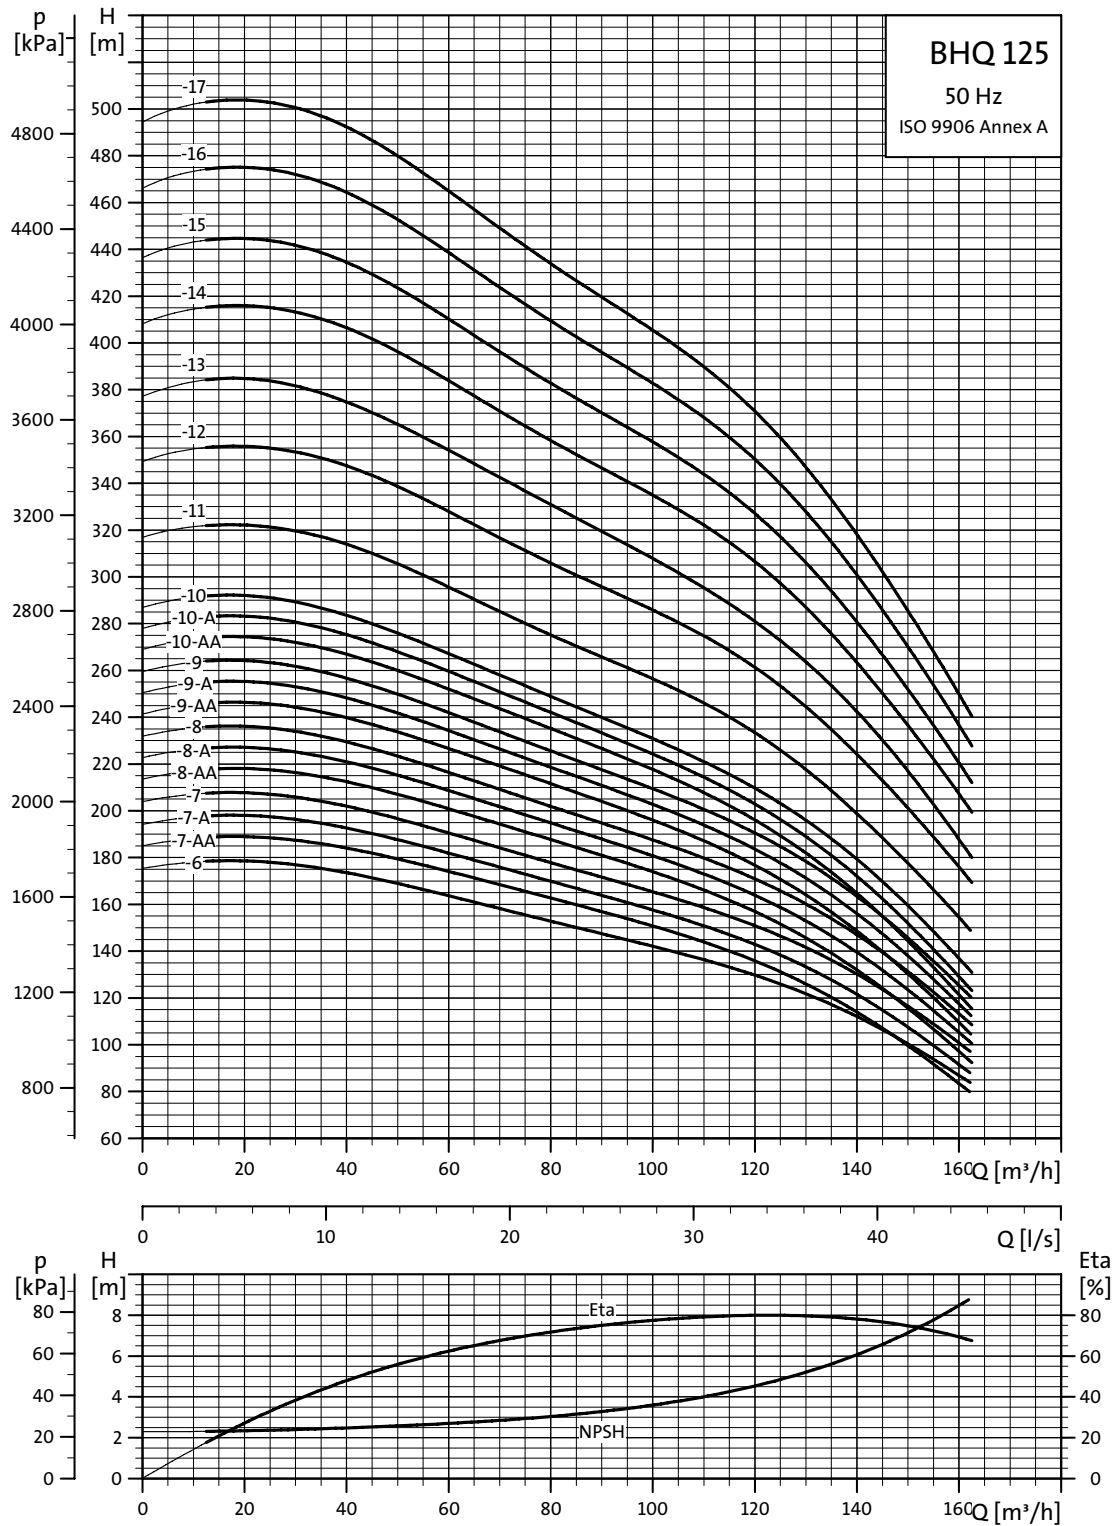


## Dimenzije i težine

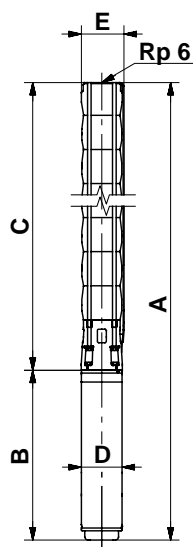


Tip crpke	Motor		Dimenzije [mm]										Neto težina [kg]
	Tip	Snaga [kW]	Rp 6 priključak				6" priрубnica				B	D	
			A	C	E*	E**	A	C	E*	E**			
BH 125-1-A	MS6	7,5	1216	651	211	218	1216	651	222	226	565	143	70
BH 125-1	MS6	11	1334	651	211	218	1334	651	222	226	683	143	79
BH 125-2-AA	MS6	13	1515	807	211	218	1515	807	222	226	708	143	88
BH 125-2-A	MS6	18,5	1590	807	211	218	1590	807	222	226	783	143	97
BH 125-2	MS6	22	1645	807	211	218	1645	807	222	226	838	143	103
BH 125-3-AA	MS6	22	1801	963	211	218	1801	963	222	226	838	143	109
BH 125-3-A	MS6	26	1866	963	211	218	1866	963	222	226	903	143	115
BH 125-3	MS6	30	1931	963	211	218	1931	963	222	226	968	143	123
BH 125-4-AA	MMS 6000	37	2544	1119	211	218	2544	1119	222	226	1425	144	176
BH 125-4-A	MMS 6000	37	2544	1119	211	218	2544	1119	222	226	1425	144	176
BH 125-4	MMS 6000	37	2544	1119	211	218	2544	1119	222	226	1425	144	176
BH 125-5-AA	MMS 8000	45	2545	1275	213	218	2545	1275	223	226	1270	192	236
BH 125-5-A	MMS 8000	45	2545	1275	213	218	2545	1275	223	226	1270	192	236
BH 125-5	MMS 8000	55	2625	1275	213	218	2625	1245	223	226	1350	192	251
BH 125-6-AA	MMS 8000	55	2781	1431	213	218	2781	1431	223	226	1350	192	257
BH 125-6-A	MMS 8000	55	2781	1431	213	218	2781	1431	223	226	1350	192	257
BH 125-6	MMS 8000	63	2921	1431	218	227	2921	1431	229	232	1490	192	283
BH 125-7-AA	MMS 8000	63	3077	1587	218	227	3077	1587	229	232	1490	192	289
BH 125-7-A	MMS 8000	63	3077	1587	218	227	3077	1587	229	232	1490	192	289
BH 125-7	MMS 8000	75	3177	1587	218	227	3177	1587	229	232	1590	192	308
BH 125-8-AA	MMS 8000	75	3333	1743	218	227					1590	192	314
BH 125-8-A	MMS 8000	75	3333	1743	218	227					1590	192	314
BH 125-8	MMS 8000	75	3333	1743	218	227					1590	192	314
BH 125-9-AA	MMS 8000	92	3729	1899	218	227					1830	192	366
BH 125-9-A	MMS 8000	92	3729	1899	218	227					1830	192	366
BH 125-9	MMS 8000	92	3729	1899	218	227					1830	192	366
BH 125-10-AA	MMS 8000	92	3885	2055	218	227					1830	192	372
BH 125-10-A	MMS 8000	92	3885	2055	218	227					1830	192	372
BH 125-10	MMS 8000	92	3885	2055	218	227					1830	192	372
BH 125-11	MMS 8000	110	4567	2507	218	227					2060	192	438
BH 125-12	MMS 10000	132	4584	2714	237	237					1870	237	556
BH 125-13	MMS 10000	132	4740	2870	237	237					1870	237	562
BH 125-14	MMS 10000	147	5095	3025	237	237					2070	237	633
BH 125-15	MMS 10000	147	5251	3181	237	237					2070	237	639
BH 125-16	MMS 10000	170	5556	3336	237	237					2220	237	685
BH 125-17	MMS 10000	170	5712	3492	237	237					2220	237	691



\* Maksimalni promjer crpke s jednim motorskim kabelom.


\*\* Maksimalni promjer crpke s dva motorska kabela.

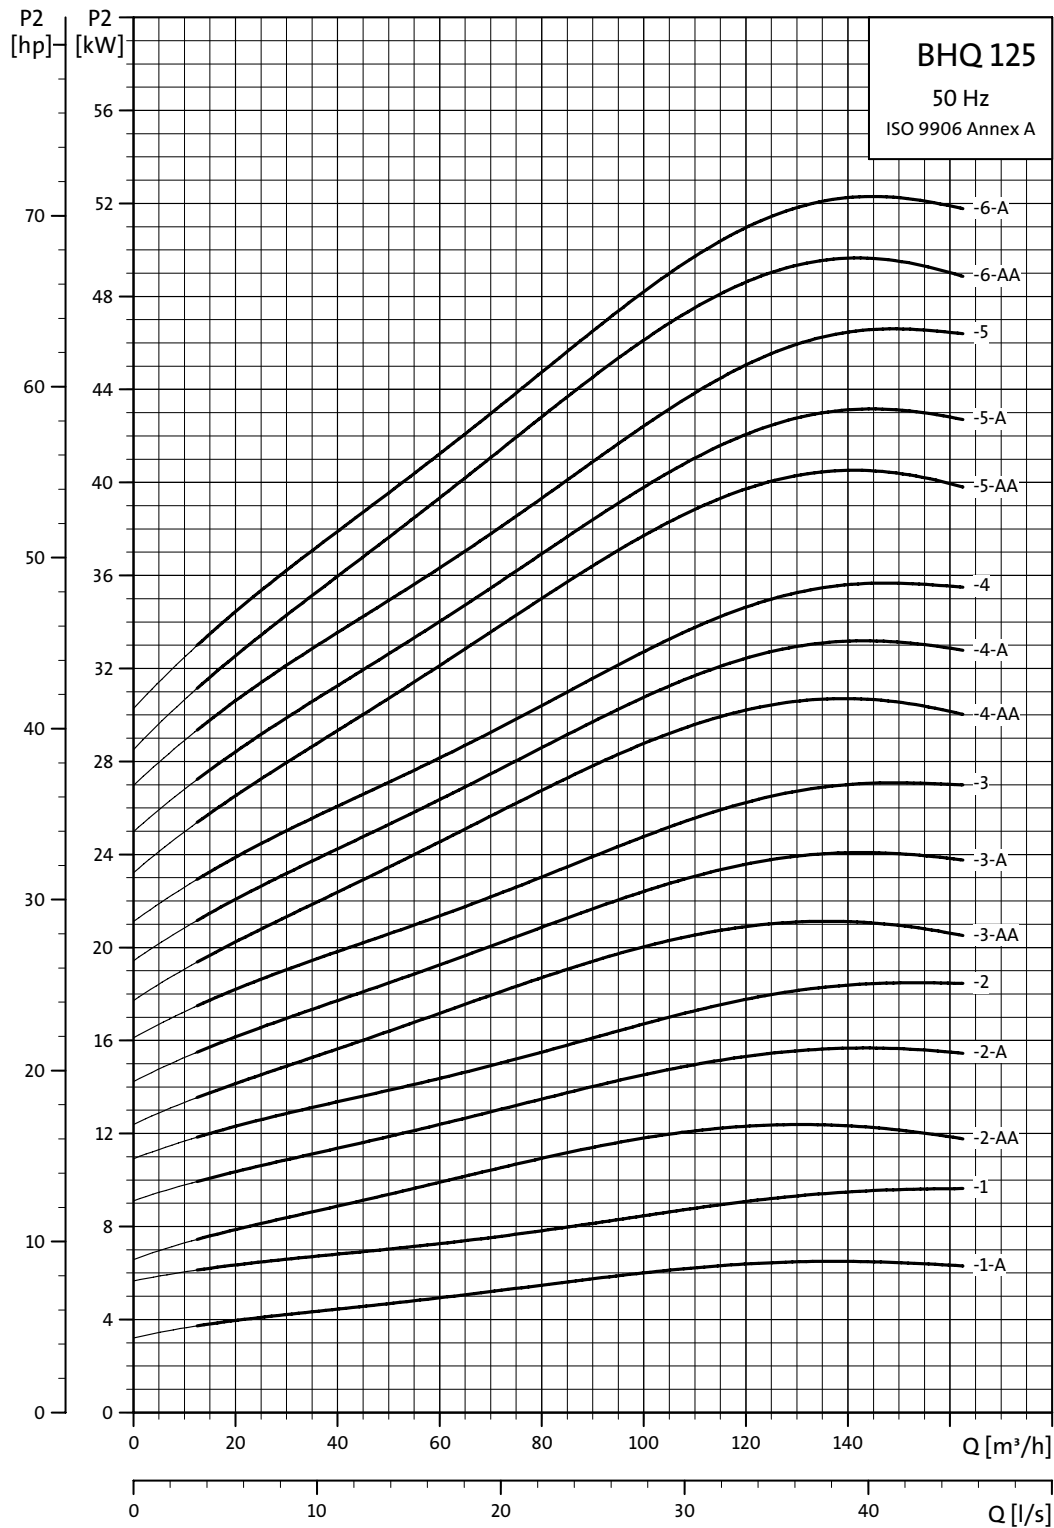


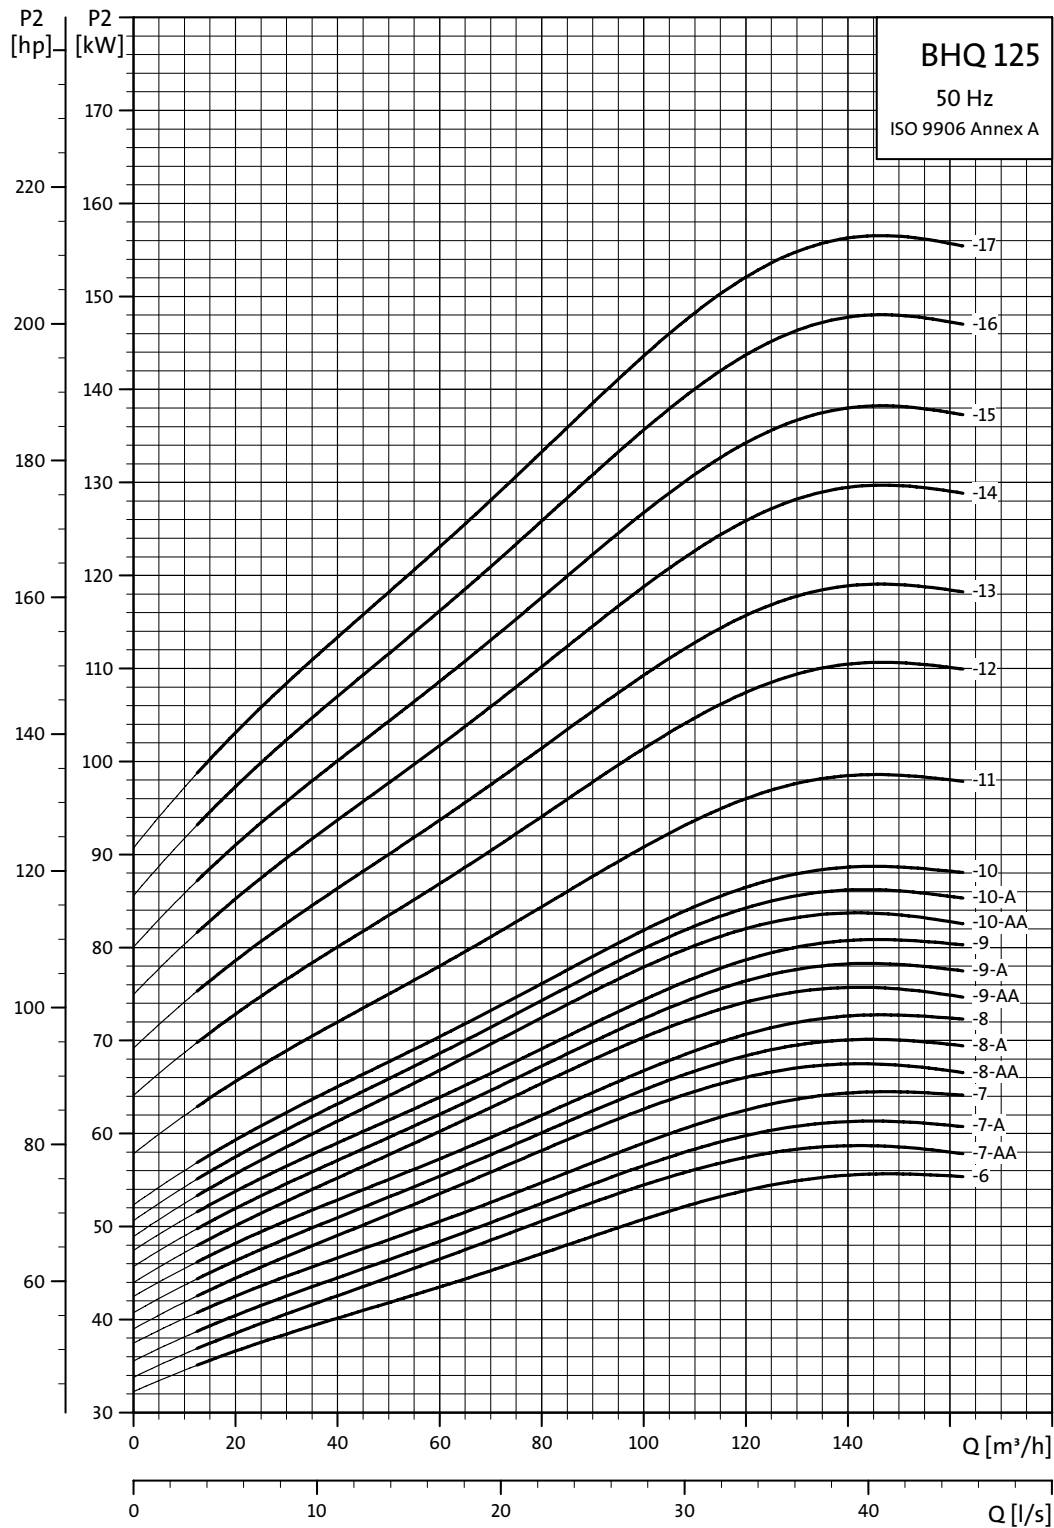


## BHQ 160

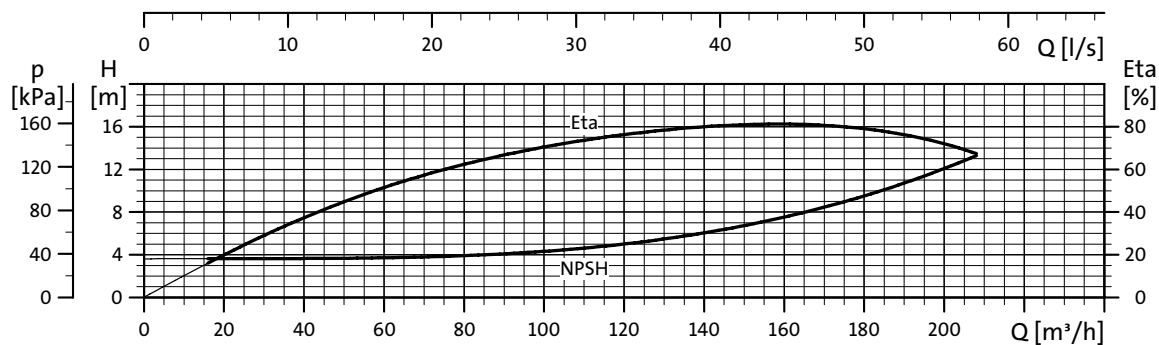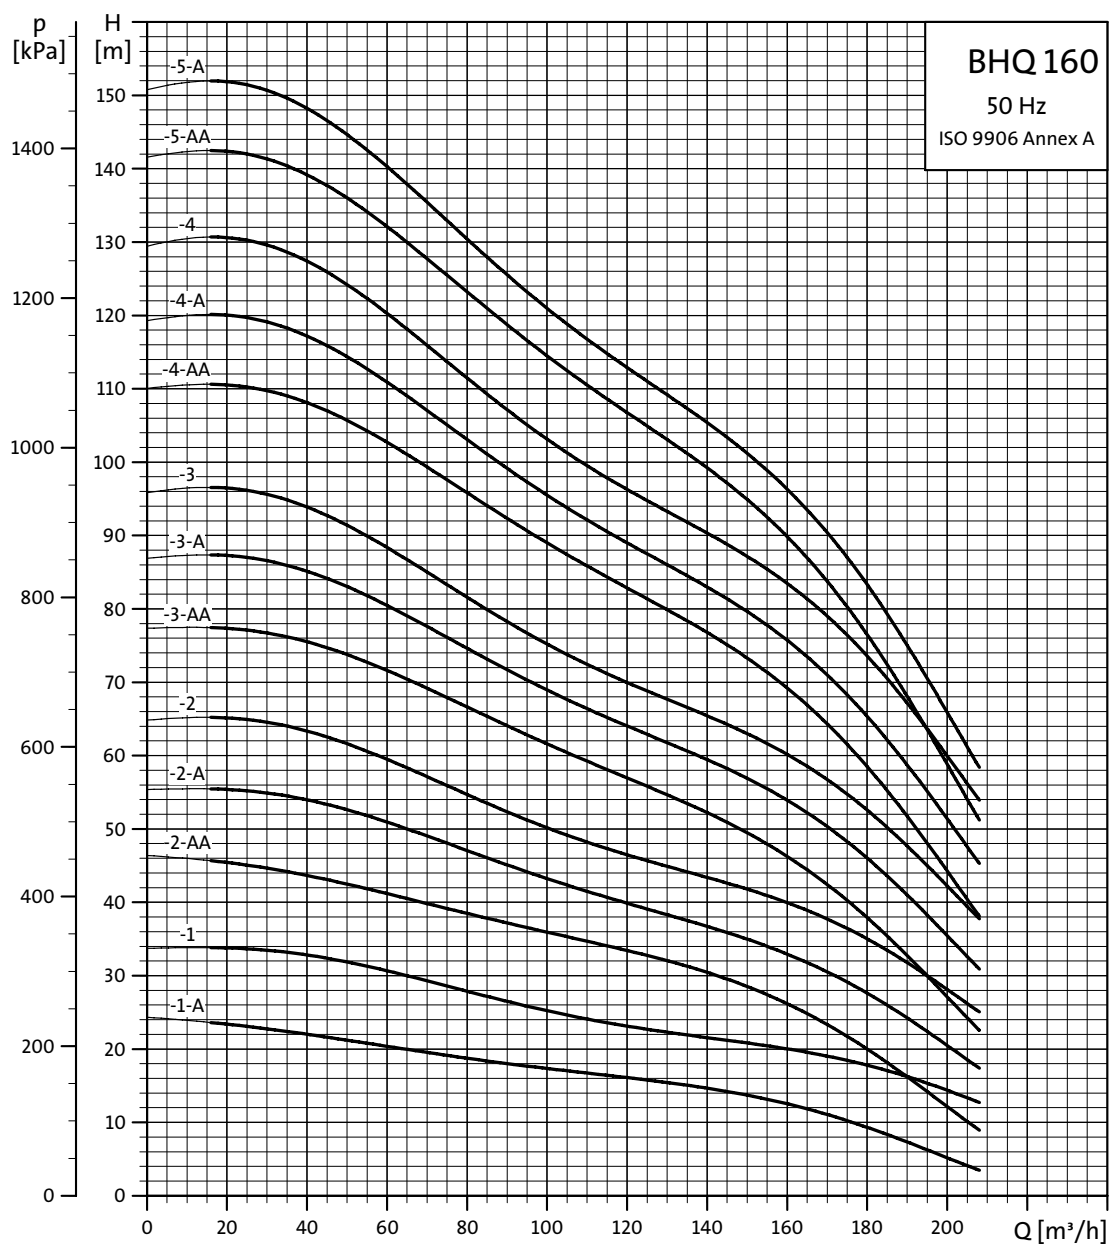

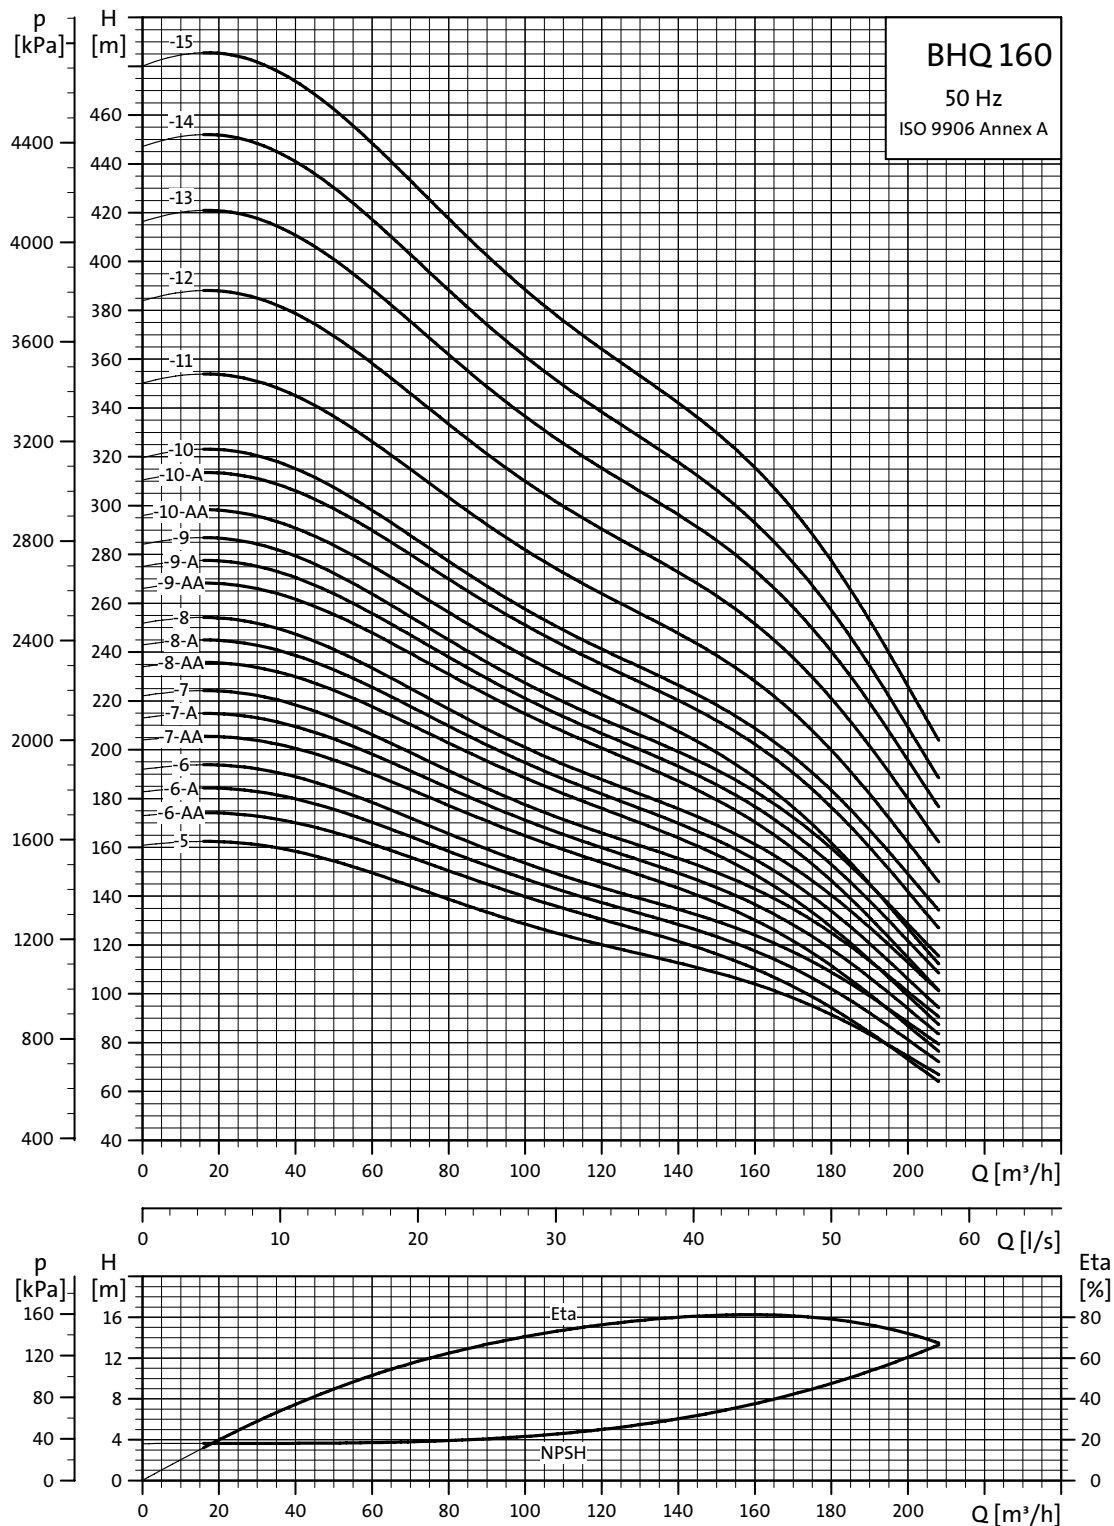


## Dimenzije i težine

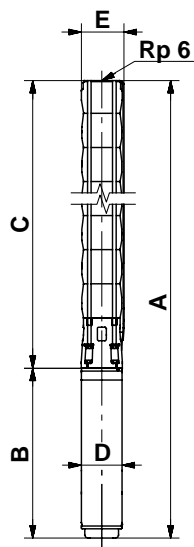


Tip crpke	Motor		Dimenzije [mm]										Neto težina [kg]
	Tip	Snaga [kW]	Rp 6 priključak				6" priрубnica				B	D	
			A	C	E*	E**	A	C	E*	E**			
BH 160-1-A	MS6	9,2	1241	651	211	218	1241	651	222	226	590	143	76
BH 160-1	MS6	13	1359	651	211	218	1359	651	222	226	708	143	82
BH 160-2-AA	MS6	18,5	1590	807	211	218	1590	807	222	226	783	143	97
BH 160-2-A	MS6	22	1645	807	211	218	1645	807	222	226	838	143	103
BH 160-2	MS6	26	1710	807	211	218	1710	807	222	226	903	143	109
BH 160-3-AA	MS6	30	1931	963	211	218	1931	963	222	226	968	143	123
BH 160-3-A	MMS 6000	37	2388	963	211	218	2388	963	222	226	1425	144	170
BH 160-3	MMS 6000	37	2388	963	211	218	2388	963	222	226	1425	144	170
BH 160-4-AA	MMS 8000	45	2389	1119	218	227	2389	1119	229	232	1270	192	230
BH 160-4-A	MMS 8000	45	2389	1119	218	227	2389	1119	229	232	1270	192	230
BH 160-4	MMS 8000	55	2469	1119	218	227	2469	1119	229	232	1350	192	245
BH 160-5-AA	MMS 8000	55	2625	1275	218	227	2625	1275	229	232	1350	192	251
BH 160-5-A	MMS 8000	55	2625	1275	218	227	2625	1275	229	232	1350	192	251
BH 160-5	MMS 8000	63	2765	1275	218	227	2765	1275	229	232	1490	192	277
BH 160-6-AA	MMS 8000	63	2921	1431	218	227	2921	1431	229	232	1490	192	283
BH 160-6-A	MMS 8000	75	3021	1431	218	227	3021	1431	229	232	1590	192	302
BH 160-6	MMS 8000	75	3021	1431	218	227	3021	1431	229	232	1590	192	302
BH 160-7-AA	MMS 8000	75	3177	1587	218	227					1590	192	302
BH 160-7-A	MMS 8000	92	3417	1587	218	227					1830	192	354
BH 160-7	MMS 8000	92	3417	1587	218	227					1830	192	354
BH 160-8-AA	MMS 8000	92	3573	1743	218	227					1830	192	360
BH 160-8-A	MMS 8000	92	3573	1743	218	227					1830	192	360
BH 160-8	MMS 8000	92	3573	1743	218	227					1830	192	360
BH 160-9-AA	MMS 8000	110	3959	1899	218	227					2060	192	416
BH 160-9-A	MMS 8000	110	3959	1899	218	227					2060	192	416
BH 160-9	MMS 8000	110	3959	1899	218	227					2060	192	416
BH 160-10-AA	MMS 8000	110	4411	2351	218	227					2060	192	432
BH 160-10-A	MMS 10000	132	4273	2403	237	237					1870	237	544
BH 160-10	MMS 10000	132	4273	2403	237	237					1870	237	544
BH 160-11	MMS 10000	132	4429	2559	237	237					1870	237	550
BH 160-12	MMS 10000	147	4784	2714	237	237					2070	237	621
BH 160-13	MMS 10000	170	5090	2870	237	237					2220	237	667
BH 160-14	MMS 10000	170	5245	3025	237	237					2220	237	673
BH 160-15	MMS 12000	190	5239	3259	286	286					1980	286	803


\* Makimalni promjer crpke s jednim motorskim kabelom.


\*\* Makimalni promjer crpke s dva motorska kabela.

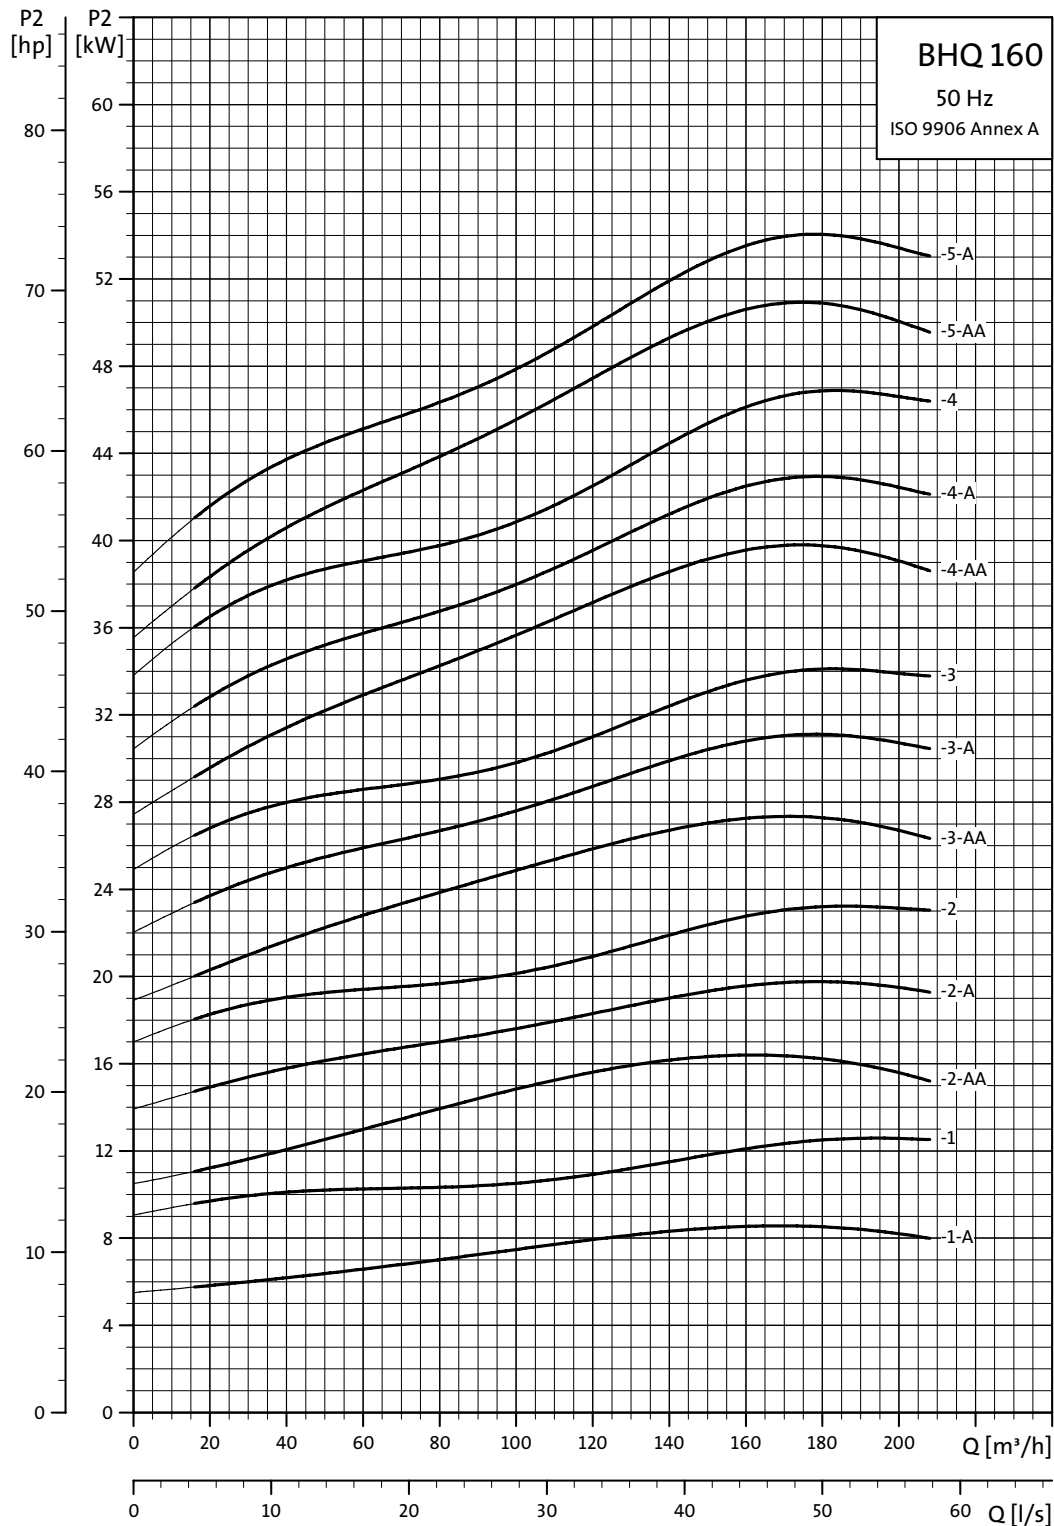


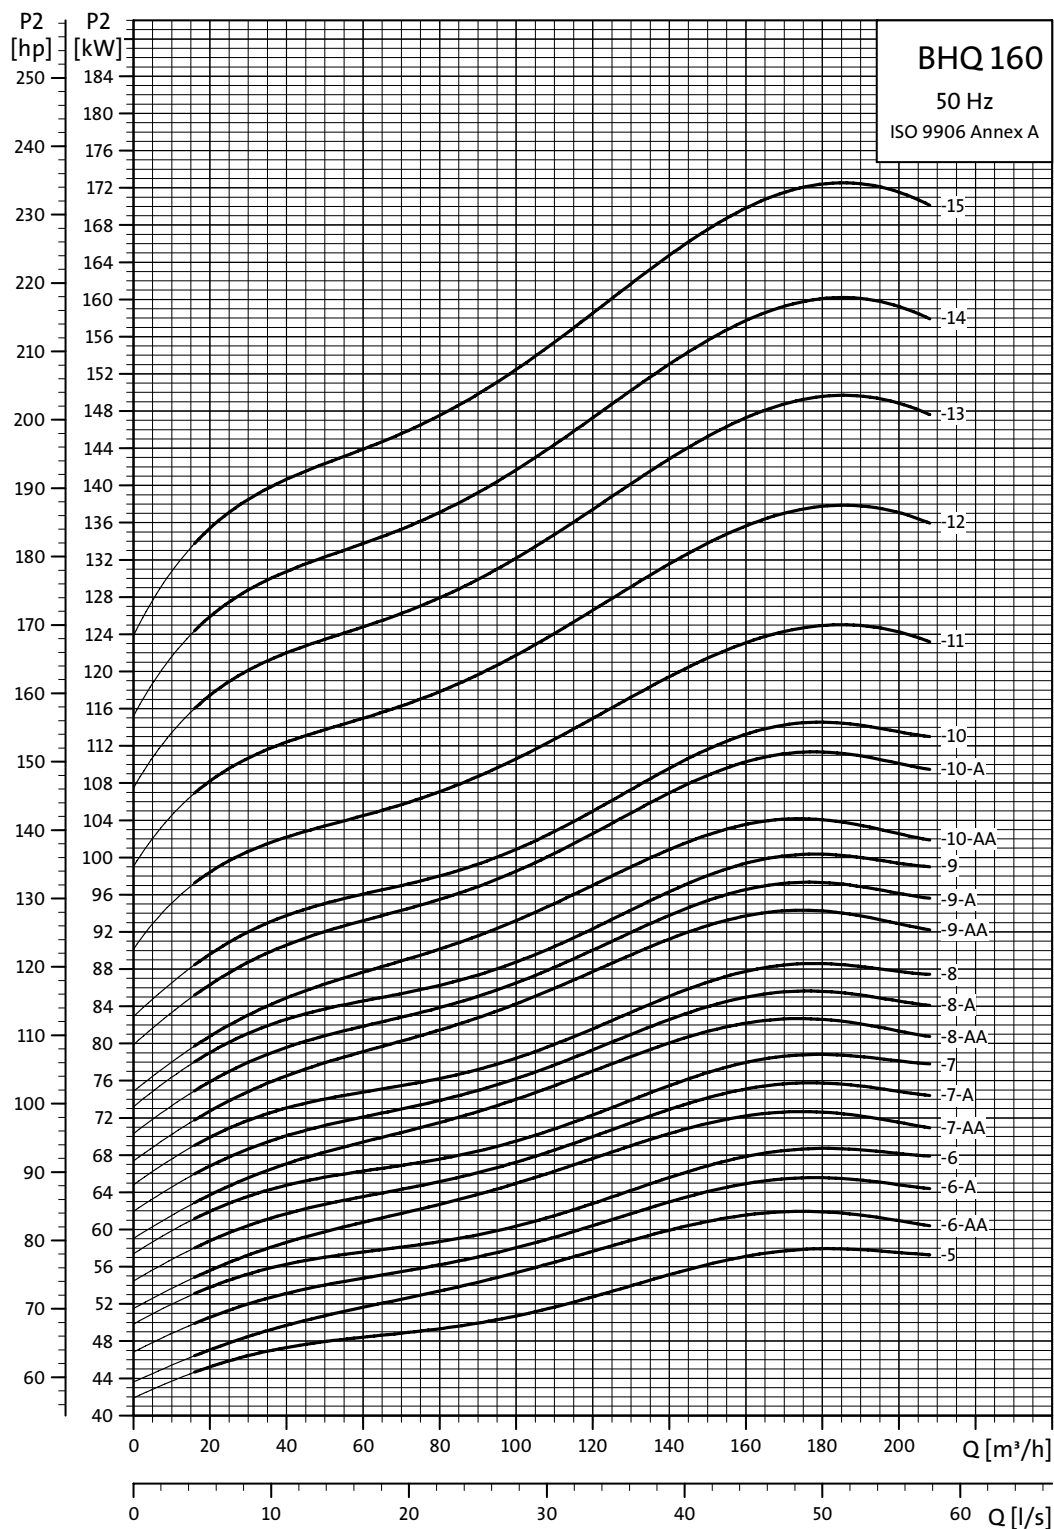


## BHQ 215

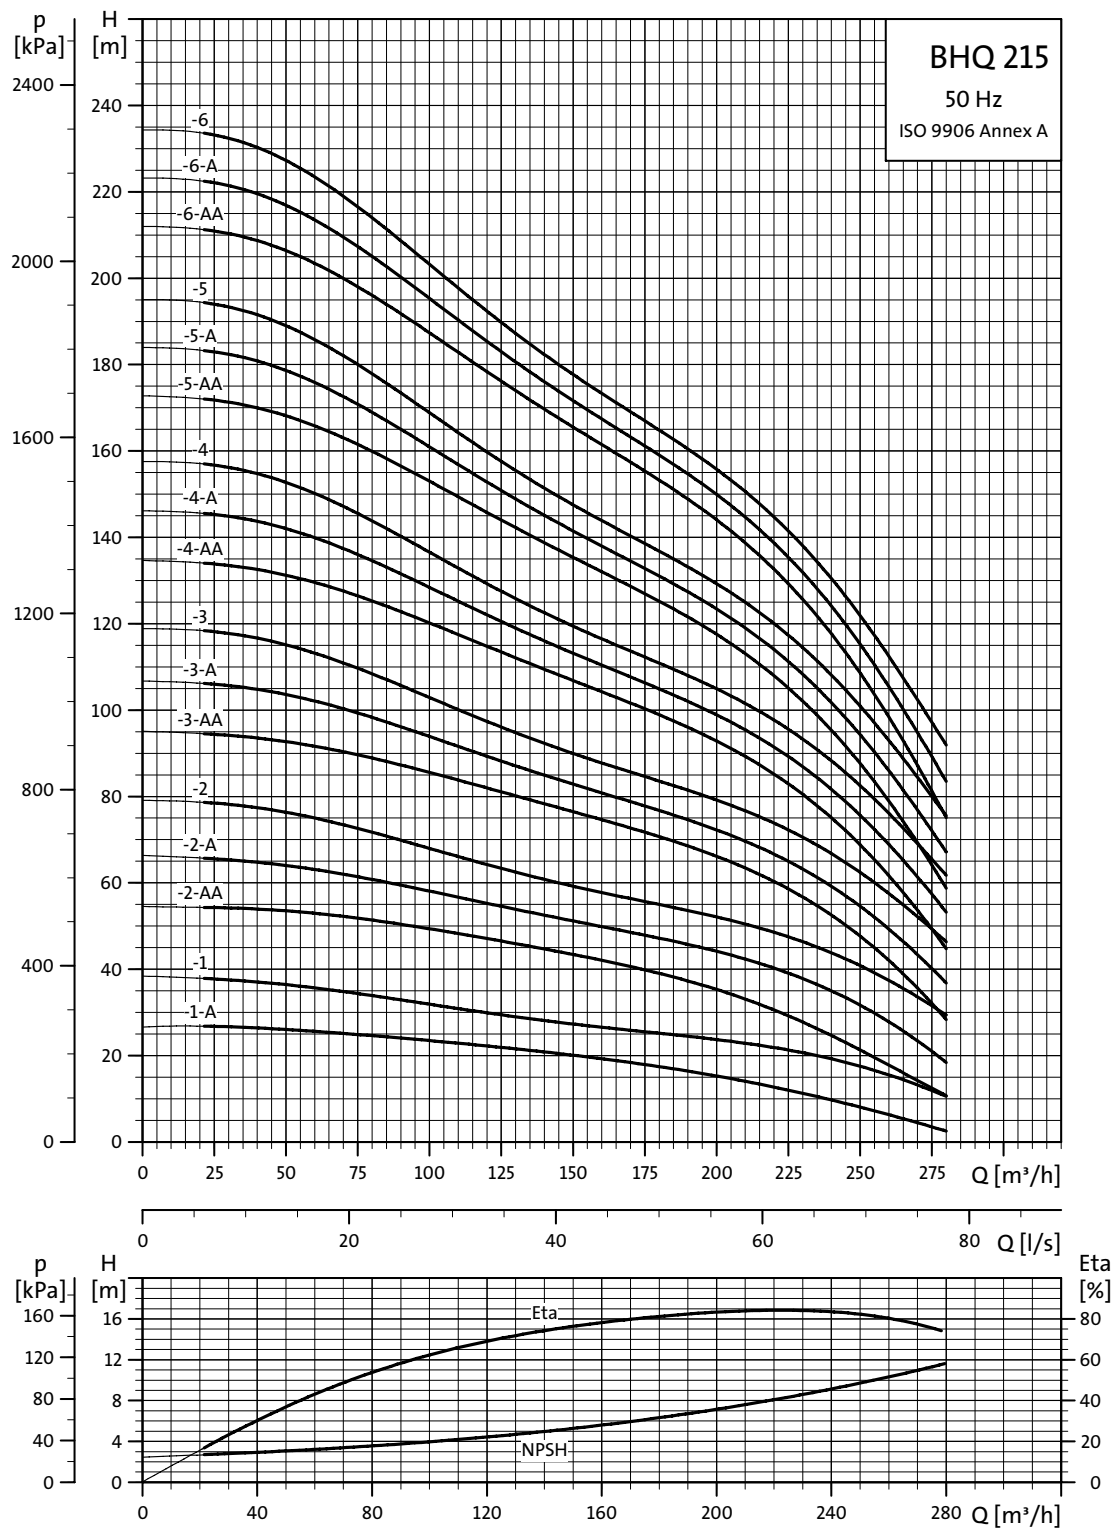

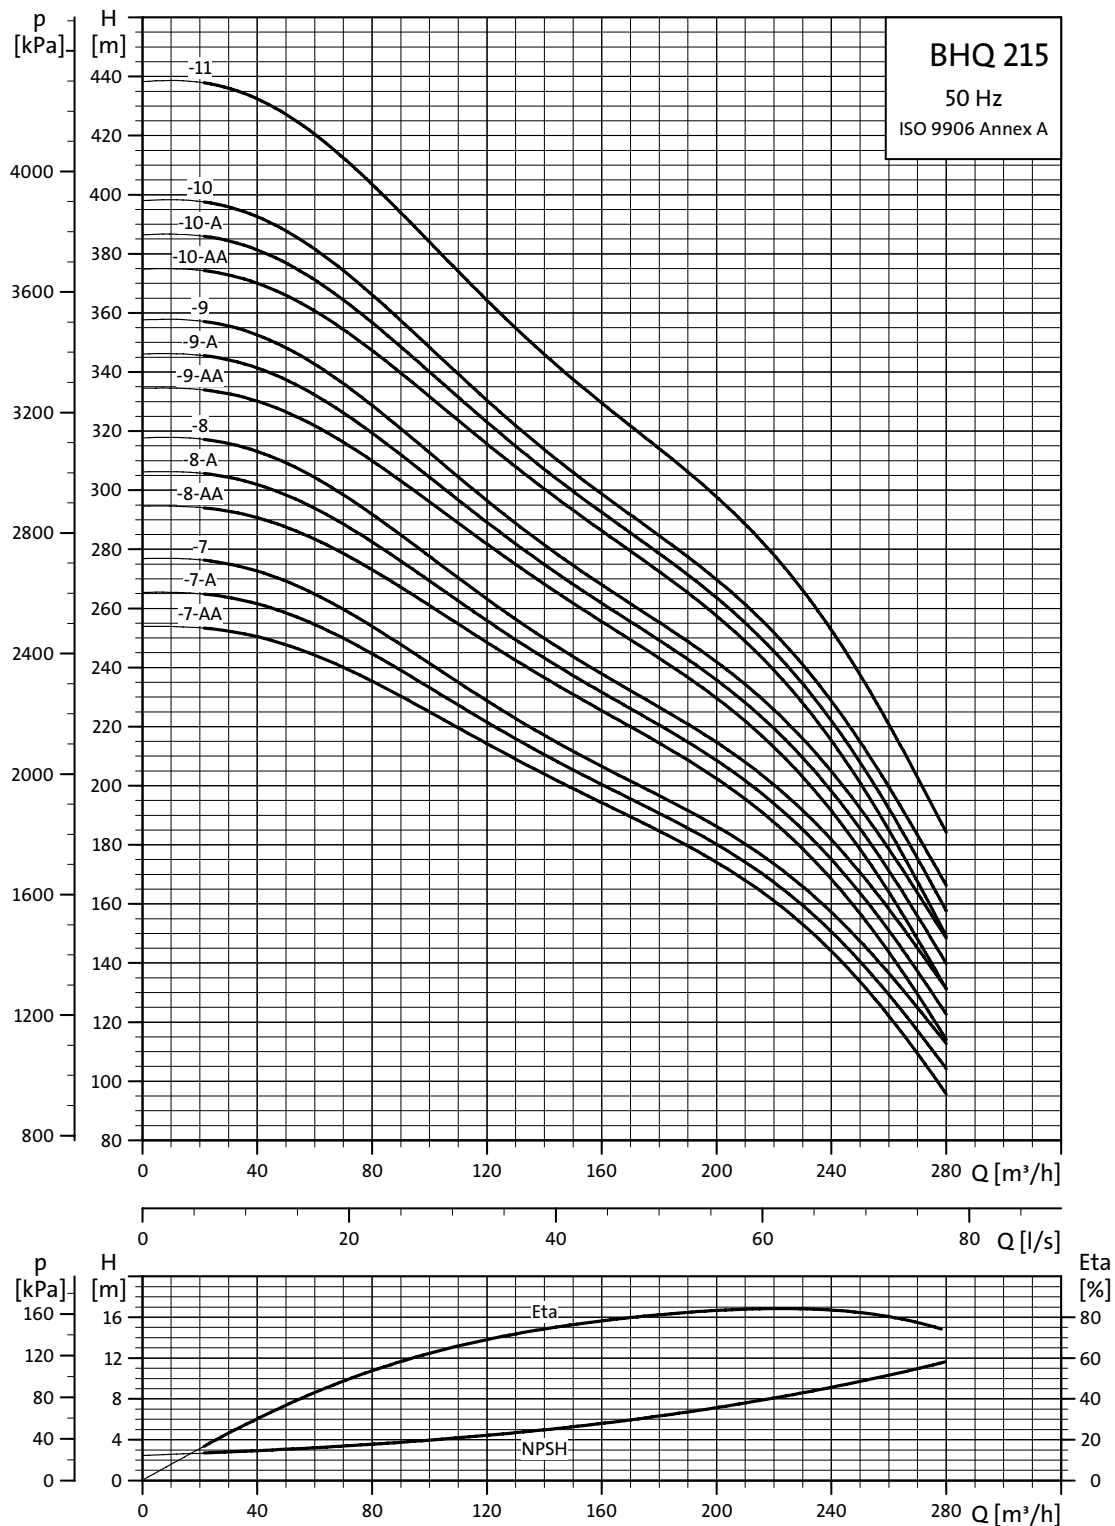

## Dimenzije i težine

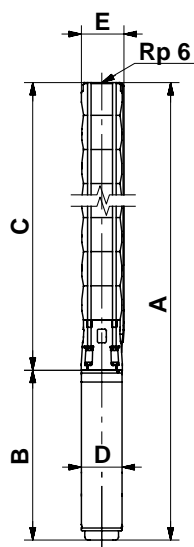

Tip crpke	Motor		Dimenzije [mm]										Neto Težina [kg]
	Tip	Snaga [kW]	Rp 6 priključak				6" priрубnica				B	D	
			A	C	E*	E**	A	C	E*	E**			
BH 215-1-A	MS6	15	1528	790	241	247	1528	790	241	247	738	143	92
BH 215-1	MS6	18,5	1573	790	241	247	1573	790	241	247	783	143	97
BH 215-2-AA	MS6	30	1934	966	241	247	1934	966	241	247	968	143	127
BH 215-2-A	MMS 6000	37	2391	966	241	247	2391	966	241	247	1425	144	174
BH 215-2	MMS 8000	45	2236	966	241	247	2236	966	241	247	1270	192	228
BH 215-3-AA	MMS 8000	55	2492	1142	241	247	2492	1142	241	247	1350	192	253
BH 215-3-A	MMS 8000	55	2492	1142	241	247	2492	1142	241	247	1350	192	253
BH 215-3	MMS 8000	63	2632	1142	241	247	2632	1142	241	247	1490	192	279
BH 215-4-AA	MMS 8000	75	2908	1318	241	247	2908	1318	241	247	1590	192	308
BH 215-4-A	MMS 8000	75	2908	1318	241	247	2908	1318	241	247	1590	192	308
BH 215-4	MMS 8000	75	2908	1318	241	247	2908	1318	241	247	1590	192	308
BH 215-5-AA	MMS 8000	92	3324	1494	241	247	3324	1494	241	247	1830	192	364
BH 215-5-A	MMS 8000	92	3324	1494	241	247	3324	1494	241	247	1830	192	364
BH 215-5	MMS 8000	92	3554	1494	241	247	3554	1494	241	247	1830	192	364
BH 215-6-AA	MMS 8000	110	3730	1670	241	247	3730	1670	241	247	2060	192	424
BH 215-6-A	MMS 8000	110	3730	1670	241	247	3730	1670	241	247	2060	192	424
BH 215-6	MMS 8000	110	3730	1670	241	247	3730	1670	241	247	2060	192	424
BH 215-7-AA	MMS 10000	132	4016	2146	241	247					1870	237	547
BH 215-7-A	MMS 10000	132	4016	2146	241	247					1870	237	547
BH 215-7	MMS 10000	132	4016	2146	241	247					1870	237	547
BH 215-8-AA	MMS 10000	147	4392	2322	241	247					2070	237	622
BH 215-8-A	MMS 10000	147	4392	2322	241	247					2070	237	622
BH 215-8	MMS 10000	147	4392	2322	241	247					2070	237	622
BH 215-9-AA	MMS 10000	170	4718	2498	276	276					2220	237	672
BH 215-9-A	MMS 10000	170	4718	2498	276	276					2220	237	672
BH 215-9	MMS 10000	170	4718	2498	276	276					2220	237	672
BH 215-10-AA	MMS 12000	190	4654	2674	276	276					1980	286	793
BH 215-10-A	MMS 12000	190	4654	2674	276	276					1980	286	793
BH 215-10	MMS 12000	190	4654	2674	276	276					1980	286	793
BH 215-11	MMS 12000	220	4990	2850	286	286					2140	286	853

\* Makimalni promjer crpke s jednim motorskim kabelom.

\*\* Makimalni promjer crpke s dva motorska kabela.

