

# BH(Q) Potopne crpke



**50 Hz**


**INOX POTOPNE PUMPE**

DOSTUPNE IZ MATERIJALA : INOX-a 304    STANDARD


DOSTUPNE IZ MATERIJALA : INOX-a 316    N - VERZIJA

DOSTUPNE IZ MATERIJALA : INOX-a 904L    R - VERZIJA

## BHQ 8

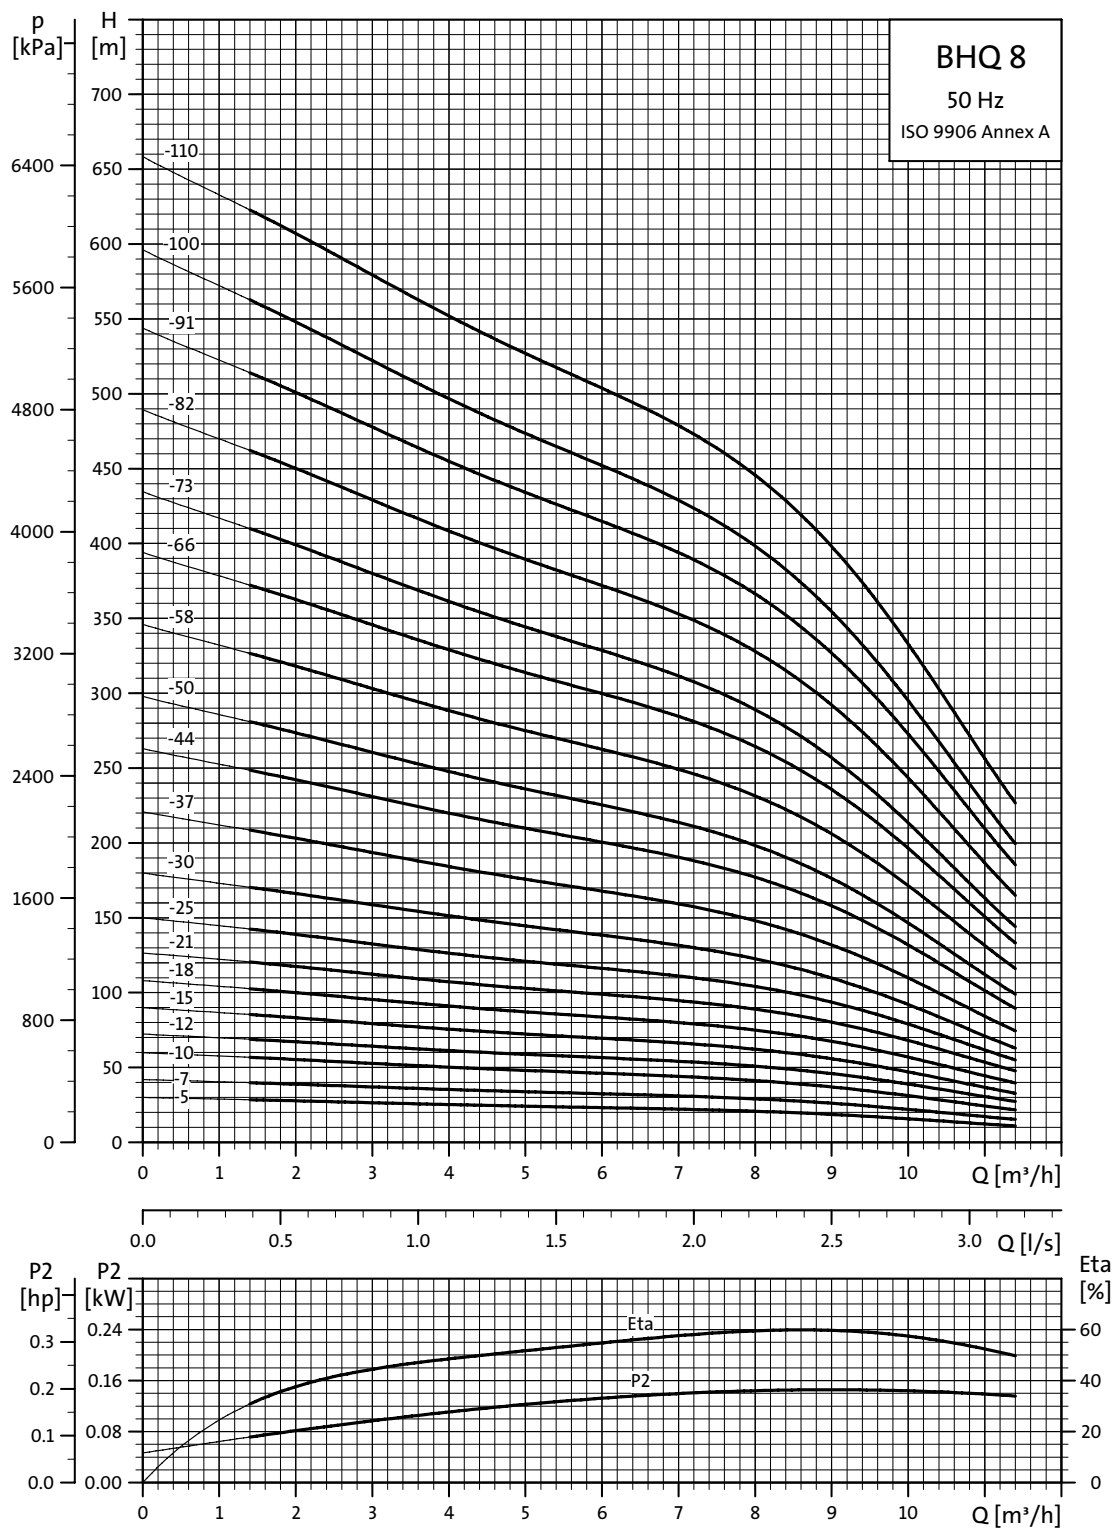

## Dimenzije i težine

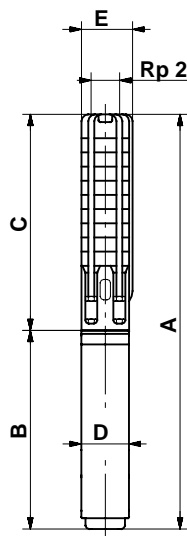

BH 8-58(N) do BH 8-110(N)  
montirane su u plašt za R 2  
priključak.

| Tip crpke    | Motor    |            | Dimenzije [mm] |        |                  |        |                  |     | Neto težina [kg] |        |                  |
|--------------|----------|------------|----------------|--------|------------------|--------|------------------|-----|------------------|--------|------------------|
|              | Tip      | Snaga [kW] | C              | B      |                  | A      |                  | D   | E                |        |                  |
|              |          |            |                | 1x230V | 3x230V<br>3x400V | 1x230V | 3x230V<br>3x400V |     |                  | 1x230V | 3x230V<br>3x400V |
| BH 8-5       | MS 402   | 0,75       | 409            | 306    | 276              | 715    | 685              | 95  | 101              | 15     | 13               |
| BH 8-5N (R)  | MS 4000R | 2,2        | 409            | 573    |                  | 982    |                  | 95  | 101              | 27     |                  |
| BH 8-5N (R)  | MS 4000R | 0,75       | 409            |        | 398              |        | 807              | 95  | 101              |        | 19               |
| BH 8-7       | MS 402   | 1,1        | 493            | 346    | 306              | 839    | 799              | 95  | 101              | 17     | 16               |
| BH 8-7N (R)  | MS 4000R | 2,2        | 493            | 573    |                  | 1066   |                  | 95  | 101              | 28     |                  |
| BH 8-7N (R)  | MS 4000R | 1,1        | 493            |        | 413              |        | 906              | 95  | 101              |        | 21               |
| BH 8-10      | MS 402   | 1,5        | 619            | 346    | 346              | 965    | 965              | 95  | 101              | 19     | 19               |
| BH 8-10N (R) | MS 4000R | 2,2        | 619            | 573    |                  | 1192   |                  | 95  | 101              | 30     |                  |
| BH 8-10N (R) | MS 4000R | 1,5        | 619            |        | 413              |        | 1032             | 95  | 101              |        | 23               |
| BH 8-12      | MS 4000  | 2,2        | 703            | 573    |                  | 1276   |                  | 95  | 101              | 30     |                  |
| BH 8-12      | MS 402   | 2,2        | 703            |        | 346              |        | 1049             | 95  | 101              |        | 21               |
| BH 8-12N (R) | MS 4000R | 2,2        | 703            | 573    | 453              | 1276   | 1156             | 95  | 101              | 30     | 25               |
| BH 8-15      | MS 4000  | 2,2        | 829            | 573    |                  | 1402   |                  | 95  | 101              | 32     |                  |
| BH 8-15      | MS 402   | 2,2        | 829            |        | 346              |        | 1175             | 95  | 101              |        | 23               |
| BH 8-15N (R) | MS 4000R | 2,2        | 829            | 573    | 453              | 1402   | 1282             | 95  | 101              | 32     | 27               |
| BH 8-18      | MS 4000  | 3,0        | 955            |        | 493              |        | 1448             | 95  | 101              |        | 29               |
| BH 8-18N (R) | MS 4000R | 3,0        | 955            |        | 493              |        | 1448             | 95  | 101              |        | 29               |
| BH 8-21      | MS 4000  | 4,0        | 1081           |        | 573              |        | 1654             | 95  | 101              |        | 35               |
| BH 8-21N (R) | MS 4000R | 4,0        | 1081           |        | 573              |        | 1654             | 95  | 101              |        | 35               |
| BH 8-25      | MS 4000  | 4,0        | 1249           |        | 573              |        | 1822             | 95  | 101              |        | 37               |
| BH 8-25N (R) | MS 4000R | 4,0        | 1249           |        | 573              |        | 1822             | 95  | 101              |        | 37               |
| BH 8-30      | MS 4000  | 5,5        | 1459           |        | 673              |        | 2132             | 95  | 101              |        | 45               |
| BH 8-30N (R) | MS 4000R | 5,5        | 1459           |        | 673              |        | 2132             | 95  | 101              |        | 45               |
| BH 8-37      | MS 4000  | 5,5        | 1753           |        | 673              |        | 2426             | 95  | 101              |        | 49               |
| BH 8-37N (R) | MS 4000R | 5,5        | 1753           |        | 673              |        | 2426             | 95  | 101              |        | 49               |
| BH 8-30      | MS6      | 5,5        | 1521           |        | 535              |        | 2056             | 143 | 138              |        | 56               |
| BH 8-30N     | MS6R     | 5,5        | 1521           |        | 535              |        | 2056             | 143 | 138              |        | 56               |
| BH 8-37      | MS6      | 5,5        | 1815           |        | 535              |        | 2350             | 143 | 138              |        | 60               |
| BH 8-37N     | MS6R     | 5,5        | 1815           |        | 535              |        | 2350             | 143 | 138              |        | 60               |
| BH 8-44      | MS 4000  | 7,5        | 2051           |        | 773              |        | 2824             | 95  | 101              |        | 60               |
| BH 8-44N     | MS 4000  | 7,5        | 2051           |        | 773              |        | 2824             | 95  | 101              |        | 60               |
| BH 8-44      | MS6      | 7,5        | 2109           |        | 565              |        | 2674             | 143 | 138              |        | 66               |
| BH 8-44N     | MS6R     | 7,5        | 2109           |        | 565              |        | 2674             | 143 | 138              |        | 66               |
| BH 8-50      | MS 4000  | 7,5        | 2303           |        | 773              |        | 3076             | 95  | 101              |        | 64               |
| BH 8-50N     | MS 4000  | 7,5        | 2303           |        | 773              |        | 3076             | 95  | 101              |        | 64               |
| BH 8-50      | MS6      | 7,5        | 2361           |        | 565              |        | 2926             | 143 | 138              |        | 70               |
| BH 8-50N     | MS6R     | 7,5        | 2361           |        | 565              |        | 2926             | 143 | 138              |        | 70               |
| BH 8---58    | MS6      | 9,2        | 3013           |        | 590              |        | 3603             | 143 | 140              |        | 104              |
| BH 8---58N   | MS6R     | 9,2        | 3013           |        | 590              |        | 3603             | 143 | 140              |        | 104              |
| BH 8---66    | MS6      | 11,0       | 3349           |        | 683              |        | 4032             | 143 | 140              |        | 114              |
| BH 8---66N   | MS6R     | 11,0       | 3349           |        | 683              |        | 4032             | 143 | 140              |        | 114              |
| BH 8---73    | MS6      | 11,0       | 3643           |        | 683              |        | 4326             | 143 | 140              |        | 120              |
| BH 8---73N   | MS6R     | 11,0       | 3643           |        | 683              |        | 4326             | 143 | 140              |        | 120              |
| BH 8---82    | MS6      | 13,0       | 4021           |        | 708              |        | 4729             | 143 | 140              |        | 131              |
| BH 8---82N   | MS6R     | 13,0       | 4021           |        | 708              |        | 4729             | 143 | 140              |        | 131              |
| BH 8---91    | MS6      | 15,0       | 4399           |        | 738              |        | 5137             | 143 | 140              |        | 143              |
| BH 8---91N   | MS6R     | 15,0       | 4399           |        | 738              |        | 5137             | 143 | 140              |        | 143              |
| BH 8---100   | MS6      | 15,0       | 4777           |        | 738              |        | 5515             | 143 | 140              |        | 150              |
| BH 8---100N  | MS6R     | 15,0       | 4777           |        | 738              |        | 5515             | 143 | 140              |        | 150              |
| BH 8---110   | MS6      | 18,5       | 5197           |        | 783              |        | 5980             | 143 | 140              |        | 164              |
| BH 8---110N  | MS6R     | 18,5       | 5197           |        | 783              |        | 5980             | 143 | 140              |        | 164              |

E = Makimalni promjer crpke uključujući zaštitu kabela i motor.

Professional



Vaš život , naša kvaliteta , diljem svijeta