

Pool lights halogen in cup HANSCRAFT H300 (PAR56) – for liner



Cat. ID	Description	kg
309011	B Pool lights halogen in cup HANSCRAFT H300	2,2

Halogen light with in a cup, 12 V/300 W power supply cable 2.6 m for foil and pre-fabricated pools, including flanges, cable glands and two protected tubes for electric wires.

A	B	C	D	E
279,00	218,00	124,00	3/4 "	3/4 "

Dimensions in mm

Flat pool lights halogen HANSCRAFT H100 – for liner



Cat. ID	Description	kg
309010	B Flat pool lights halogen HANSCRAFT H100	1,65

Halogen light 12 V/100 W power supply cable 3.4 m, for liner, concrete and pre-fabricated pools. Installation with round or cross holder incl. as well as colour lenses: yellow, red, blue, green.



Model	A	B
PAPL-P100C	88,68	296

Dimensions in mm

Pool light halogen HANSCRAFT H50 PROFI – for liner



Cat. ID	Description	kg
309012	B Pool light halogen HANSCRAFT H50 PROFI	1,2

Underwater halogen floodlight with low power consumption and high performance. 50 W/12 V, the cord 2,5 m, 2 x 1.5 mm², for liner, concrete and prefabricated pools. UV filter external ø 163 mm.

Pool light halogen HANSCRAFT H50 SuperWhite – for liner





Cat. ID	Description	kg
309013	B Halogen pool light HANSCRAFT H50 SuperWhite	1,2

Underwater halogen floodlight with low power consumption and high performance. 50 W/12 V, the cord 2,5 m, 2 x 1.5 mm², for liner, concrete and prefabricated pools. UV filter external ø 100 mm.

LED pool light in a cup HANSCRAFT LED 252 (PAR56) multicolor

Cat. ID	Description	kg
309021	B LED pool light in a cup HANSCRAFT LED 252 – for liner	2,3
309170	B LED pool light in a cup HANSCRAFT LED 324 – for liner	2,3

LED light-emitting diode in a cup, 252 (12 V/18 W) and 324 (12 V/24 W) multi colour LEDs with remote control and switchable colour, power cord 3.4 m, for liner, concrete and prefabricated pools. Including flanges and two isolated electrical cables. protection IP 68.

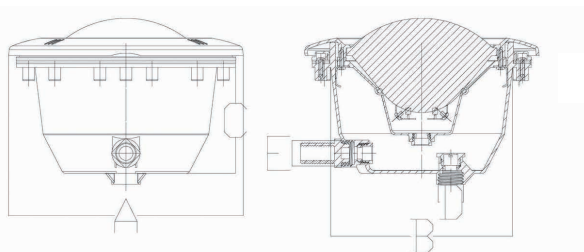


A	B	C	D	E
279,00	218,00	124,00	3/4"	3/4"

Dimensions in mm

LED pool light LED 252 – white – concrete pool

Cat. ID	Description	kg
309090	B LED pool light LED 252 – white –concrete pool	2,3

LED light-emitting diode in a cup, 252 (12 V/18 W) white colour, power cord 3.4 m, for liner, concrete and prefabricated pools. Including flanges and two isolated electrical cables.

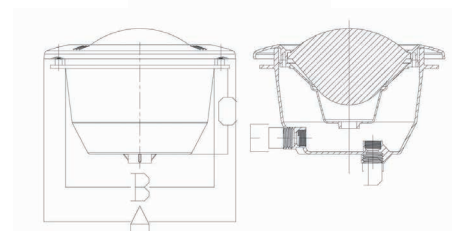

A	B	C	D	E
279,00	218,00	12,00	3/4"	3/4"


Dimensions in mm

LED pool light narrow HANSCRAFT LED100 multicolor - for liner



Cat. ID	Description	kg
309020	B LED pool light narrow HANSCRAFT LED100 multicolor	2,3

LED 100 catalogue number 309020 LED light-emitting diode, 12 V 100 multi-colored LEDs power cord 3.4 m, for liner, concrete swimming pool.

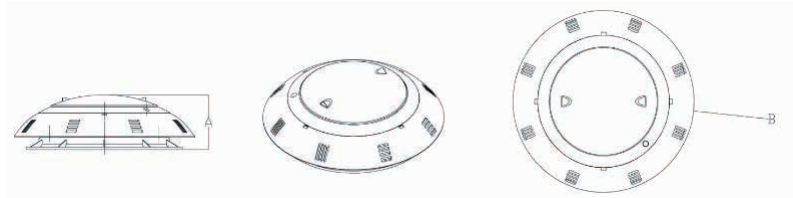

Model	A	B
PA010010	88,68	296


Dimensions in mm

LED pool light narrow HANSCRAFT LED100 white - for liner



Cat. ID	Description	kg
309024	B LED pool light narrow HANSCRAFT LED100 white	2,3

LED light-emitting diode, 12 V 100 white LEDs power cord 3.4 m, for liner, concrete & prefabricated swimming pool Installation with round or cross holder incl.

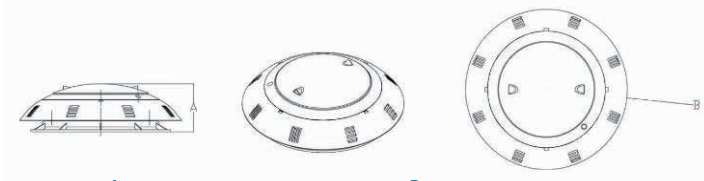

Model	A	B
PA010010	88,68	296

Dimensions in mm

LED pool light HANSCRAFT LED18 PROFI - for liner



Cat. ID	Description	kg
309022	B LED pool light HANSCRAFT LED18 PROFI	1,9

18 super shiny multi-coloured LEDs, 84000 mCD, 12 V, power cord 2.5 m, 2 x 0.75 mm², for liner, concrete and prefabricated pools, IP-68, thermal protection glass, UV filter external ø 163 mm.

LED pool light HANSCRAFT LED18 Super - for liner



Cat. ID	Description	kg
309023	B LED pool light HANSCRAFT LED18 Super	1,9





18 super shiny multi-coloured LEDs, 84000 mCD, 12 V, power cord 2.5 m, 2 x 0.75 mm², for liner, concrete and prefabricated pools, IP-68, thermal protection glass, UV filter external ø 100 mm.

PROXIMA LED light with high brightness



Cat. ID	Description	kg
307030	B PROXIMA LED 252 flat light –multicolor RGB	
307031	B PROXIMA LED 441 flat light –multicolor RGB	
307032	B PROXIMA LED 252 flat light –white	
307033	B PROXIMA LED 441 flat light –white	

- lifetime of 25 000 hours, 10 times longer than conventional lights
- with improved LED technology it is the perfect illumination for your entire pool
- unlike other lights, it works even if one LED light breaks
- supply cable 2.5 m
- low consumption

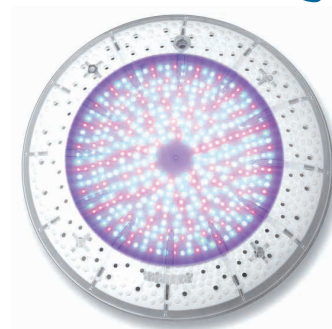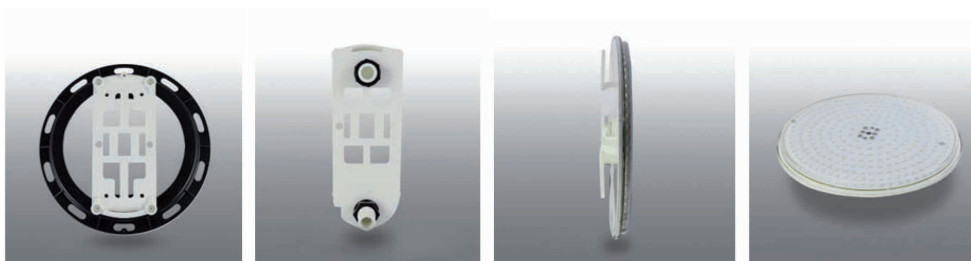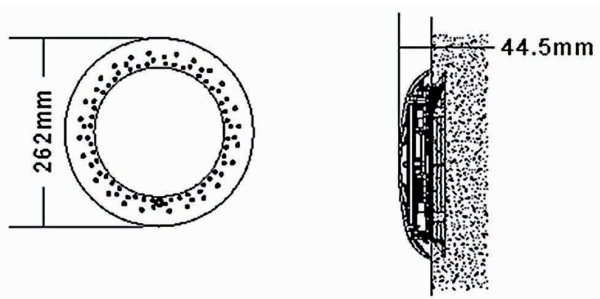

U/W spotlight 100 W flat for concrete pool



Cat. ID	Description	kg
309080	B U/W reflektor 100 W plochý pro betonový bazén	

U/W spotlight for liner pool – Lamp 300 W 12 V PAR56. Supplied with 3 m cable. Front ring of white ABS plastic. Brass inserts.

U/W spotlight 300 W for concrete pool incl. tube



Cat. ID	Description	kg
309081	B U/W reflektor 300 W pro betonový bazén vč. hadice	

U/W spotlight for concrete pool – supplied with a housing. Lamp 300 W 12 V PAR56. Supplied with 3m cable. Casing of white ABS plastic.

U/W spotlight 300 W incl. 1,5 m cable tube



Cat. ID	Description	kg
309082	B U/W spotlight 300 W incl. 1,5m cable tube	


U/W spotlight for liner pool – supplied with a housing. Lamp 300 W 12 V PAR56. Supplied with 3 m cable. Casing of white ABS plastic.

U/W spotlight 300 W with brass inserts



Cat. ID	Description	kg
309083	B U/W spotlight 300 W with brass inserts	

U/W spotlight for liner pool – supplied with a housing. Lamp 300 W 12 V PAR56. Supplied with 3 m cable. Casing of white ABS plastic. Brass inserts.

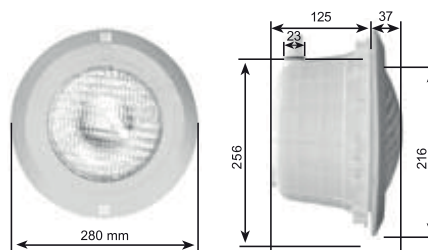



Pool spotlight 20 W SPL white - MTS

Cat. ID	Description	kg
309092	B Pool spotlight 20 W SPL white- MTS	



Pool spotlight 20 W SPL chrom - MTS

Cat. ID	Description	kg
309093	B Pool spotlight 20 W SPL chrom - MTS	



Pool spotlight 35 W SPL white - MTS

Cat. ID	Description	kg
309094	B Pool spotlight 35 W SPL white - MTS	



Underwater speaker - for concrete

Cat. ID	Description	kg
307040	B Underwater speaker MTS 30 W / 8 ohm ABS for concrete	

- frequency range 100 -10.000 Hz
- max. water depth 3 m
- max. installation depth 1,2 m
- diameter 249 mm
- cable length 15 m



Underwater speaker - for concrete

Cat. ID	Description	kg
307041	B Underwater speaker MTS 30 W / 8 ohm ABS for concrete -chrom	

- frequency range 100 -10.000 Hz
- max. water depth 3 m
- max. installation depth 1,2 m
- diameter 249 mm
- cable length 15 m



Underwater speaker MTS 30 W/8 ohm ABS for liner

Cat. ID	Description	kg
307042	B Underwater speaker MTS 30 W / 8 ohm ABS for liner	

- frequency range 100 -10.000 Hz
- max. water depth 3 m
- max. installation depth 1,2 m
- diameter 249 mm
- cable length 15 m



Underwater speaker steel - for liner

Cat. ID	Description	kg
307043	B Underwater speaker MTS 30 W / 8 ohm, steel for liner	

- frequency range 100 -10.000 Hz
- max. water depth 3 m
- max. installation depth 1,2 m
- diameter 249 mm
- cable length 15 m



Pool lights MTS underwater 300 W for liner



Cat. ID	Description	kg
309095	B Pool lights MTS underwater 300 W for liner	

Pool lights MTS underwater 300 W for liner - white



Cat. ID	Description	kg
309096	B Pool lights MTS underwater 300 W for liner - white	

Pool lights MTS 300 W/12 V for concrete



Cat. ID	Description	kg
309091	B Pool lights MTS 300 W/12 V for concrete	

Pool lights MTS 300 W/12 V for concrete



Cat. ID	Description	kg
309098	B Pool lights MTS 300 W/12 V for concrete	

Pool lights MTS 300 W, steel - for concrete



Cat. ID	Description	kg
309099	B Pool lights MTS 300 W, steel -for concrete	

Junction box to the light MTS



Cat. ID	Description	kg	RRP (EUR)
309032	B Junction box to the light MTS		27,50


Cat. ID	Description	kg
309162	B Cable tube for concrete	

Cable tube for concrete



Cat. ID	Description	kg
309140	B Cable gland	
309070	B Cable gland with set of screws	

Cable gland

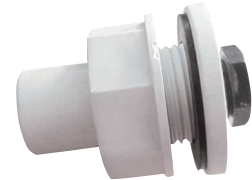

Cat. ID	Description	kg
309030	B Junction box to the light	

Junction box for light



Cat. ID	Description	kg
309040	B Colour lenses for light H100	

Colour lenses for light H100




Replacement LED 12 V 100 Multicolour

Cat. ID	Description	kg
309120	E Bulb LED100	
309124	E Bulb LED100 - white	



Replacement LED 12 V 100 Multicolour for LED18

Cat. ID	Description	kg
309122	E Bulb for LED18	



Cat. ID	Description	kg
309123	E Bulb LED252-white + remote control	
309121	E Bulb LED252-multicolor + remote control	

Spare LED252



Cat. ID	Description	kg
309111	B PAR56 - bulb 300 W/12 V for H300	
309110	E Bulb100 W/12 V for H100	

Halogen bulb



Accessories for lights

Bulb 50 W/12 V for H50



Cat. ID	Description	kg
309112	E Bulb 50 W	

Gasket set for H50 PROFI and LED18 PROFI




Cat. ID	Description	kg
309130	E Gasket set for H50 PROFI & LED18 PROFI lights 2 pcs	

Gasket set for H50 SuperWhite and LED18 SuperLED



Cat. ID	Description	kg
309131	E Gasket set H50 / LED18	


ESP - Junction box made of ABS plastic



Cat. ID	Description	kg
309031	B Junction box ABS	

Made of white ABS, UV resistant. With 3 3/4 packing seals and rubber gaskets. Fully plastic, therefore corrosion resistant.

ESP - Cable tube 1 m

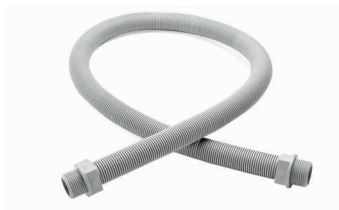

Cat. ID	Description	kg
309071	B Cable tube 1 m	

Cover electrical wiring for lights SSL - MTS



Cat. ID	Description	kg
307103	B Cover electrical wiring MTS	

Safety transformer (230-11,5 V)



Cat. ID	Description	kg
310014	B Safety transformer 50 VA (230-11,5 V)	1,4
310010	B Safety transformer 100 VA (230-11,5 V)	1,5
310011	B Safety transformer 200 VA (230-11,5 V)	2,1
310012	B Safety transformer 300 VA (230-11,5 V)	3,5



Safety transformer 50 VA DC



Cat. ID	Description	kg
310120	B Safety transformer 50 VA DC	3,0



Safety transformer 230-212 V-25 A-IP65



Cat. ID	Description	kg
310114	B Safety transformer 50 VA 230-12 V-25 A-IP65	1,7
310110	B Safety transformer 100 VA 230-12 V-25 A-IP65	2,5
310111	B Safety transformer 200 VA 230-12 V-25 A-IP65	4,3
310112	B Safety transformer 300 VA 230-12 V-25 A-IP65	5,6
310113	B Safety transformer 600 VA 230-12 V-25 A-IP65	8,7



Cat. ID	Description	kg
309072	B Silicone cable MTS -1 m	

Cable MTS



RF synchronizer for LED 252



Cat. ID	Description	kg
309050	B RF synchronizer L252	


- for HANSCRAFT LED 252 and LED 324

Control cabinet for lights with remote control



Cat. ID	Description	kg
309060	B Control box with remote control	

- maximum load of 600 W with voltage indicator
- remote control
- made of durable plastic
- two control modes: manual and timer (you can use ON / OFF function)
- IP44 protection

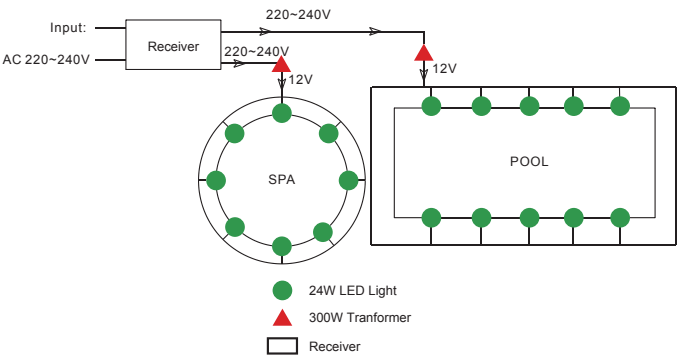

Control box for light



Cat. ID	Description	kg
309061	B Control box for light	


- maximum load of 2.2 kW with voltage indicator
- suitable for pool lights for pumps
- made of durable plastic
- two control modes: manual and timer
- IP44 protection

UNDERWATER LIGHT FOR CONCRETE POOLS



"Standard 2002" underwater light for concrete pools. Frame made of white ABS, niche in white PP plastic. Complete with 300W / 12V PAR 56 bulb 2 x 4mm cable of 2,5 lenght. Alternative "SIDE" or "BOTTOM" cable outlet on the niche. Frame with stainless steel locking mechanism.

Code	Description	PKG	WGT
020100	C Underwater light STD2002 for concrete 300W/12V	1	2,5
020120	C Underwater light STD2002 for concrete SMD WHITE LED 20W/12V	1	2,5
020130	C Underwater light STD2002 for concrete SMD RGB LED 15W/12V	1	2,5
020201	C Underwater light STD2002 Inox frame	1	0,5

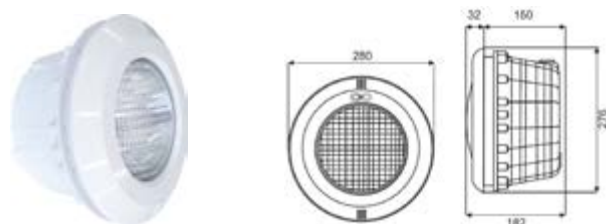

WP high quality underwater light for concrete pools. Complete with 300W / 12V PAR 56 bulb, or White LED or RGB LED bulb.

Code	Description	PKG	WGT
025101	C Underwater light WP for concrete 300W/12V	1	
025102	C Underwater light WP for concrete SMD WHITE LED 21W/12V	1	
025103	C Underwater light WP for concrete SMD RGB LED 18W/12V	1	



Code	Description	PKG	WGT
021100	C Underwater light MINI2001 for concrete 50W/12V	4	0,5
021110	C Underwater light MINI2001 36 WHITE SMD LED for concrete 6W/12V	4	0,5
021114	C Underwater light MINI2001 36 RGB SMD LED for concrete 6W/12V	4	0,5
021200	C Underwater light MINI2008 for concrete 50W/12V	1	2,7
021210	C Underwater light MINI2008 36 WHITE SMD LED for concrete 6W/12V	1	2,7
021214	C Underwater light MINI2008 36 RGB SMD LED for concrete 6W/12V	1	2,7
021103	C Underwater light MINI2001 Inox frame	1	0,5
021202	C Underwater light MINI2008 for liner 50W/12V	1	0,5



Made of injected ABS, white colour, unalterable against physical and chemical agents. Lamp screen made in transparent polycarbonate. Supplied with three (3) m.cable 2 x 1,5 Ø 8 mm. Lamp 100 W / 12V halogen or 25W / 12V LED.


Code	Description	PKG	WGT
020001	C Underwater light FLAT for concrete 100W/12V	8	1,1
020002	C Underwater light FLAT 2" fixing part for concrete 100W/12V	4	1,8

UNDERWATER LIGHT FOR LINER POOLS



"Standard 2002" underwater light for liner pools. Frame made of white ABS, niche in white PP plastic. Complete with 300W / 12V PAR 56 bulb 2 x 4mm cable of 2,5 lenght. Alternative "SIDE" or "BOTTOM" cable outlet on the niche. Frame with stainless steel locking mechanism

Code	Description	PKG	WGT
020200	C Underwater light STD2002 for liner 300W/12V	1	2,5
020220	C Underwater light STD2002 for liner SMD WHITE LED 20W/12V	1	2,5
020230	C Underwater light STD2002 for liner SMD RGB LED 15W/12V	1	2,5
020201	C Underwater light STD2002 Inox frame	1	0,5

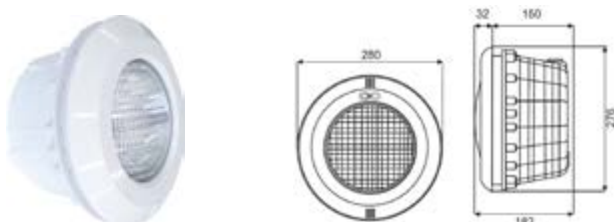


WP high quality underwater light for liner pools. Complete with 300W / 12V PAR 56 bulb, or White LED or RGB LED bulb.

Code	Description	PKG	WGT
025107	C Underwater light WP for liner 300W/12V	1	
025108	C Underwater light WP for liner SMD WHITE LED 21W/12V	1	
025109	C Underwater light WP for liner SMD RGB LED 18W/12V	1	



Code	Description	PKG	WGT
021100	C Underwater light MINI2001 for concrete 50W/12V	4	0,5
021102	C Underwater light MINI2001 Male Threaded 2" 50W/12V	4	0,5
021105	C Underwater light MINI2001 Wall conduit for liner	4	0,5
021110	C Reflektor MINI2001 36 WHITE SMD LED betonos 6W/12V	4	0,5
021112	C Underwater light MINI2001 36 WHITE SMD LED Male Threaded 2" 6W/12V	4	0,5
021114	C Underwater light MINI2001 36 RGB SMD LED for concrete 6W/12V	4	0,5
021116	C Underwater light MINI2001 36 RGB SMD LED Male Threaded 2" 6W/12V	4	0,5
021202	C Underwater light MINI2008 for liner 50W/12V	1	2,7
021212	C Underwater light MINI2008 36 WHITE SMD LED for liner 6W/12V	1	2,7
021216	C Underwater light MINI2008 36 RGB SMD LED for liner 6W/12V	1	2,7

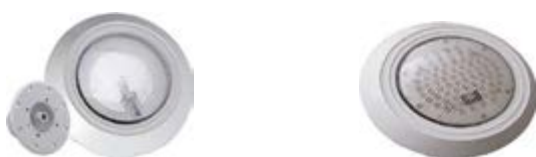

Made of injected ABS, white colour, unalterable against physical and chemical agents. Lamp screen made in transparent polycarbonate. Supplied with three (3) m.cable 2 x 1,5 Ø 8 mm. Lamp 100 W / 12V halogen or 25W / 12V LED.

Code	Description	PKG	WGT
020621	C Underwater light LED FLAT 2" fixing part, FRP - PP 25W/12V	4	1,8
020622	C Underwater light LED FLAT 2" fixing part, liner 25W/12V	4	1,8

LED BULB



PAR 56 single color LED bulbs with Power LED. Available performances 8 - 35W / AC-DC 11-14V. 50.000h propose life-span - heat sensitive Automatic Current Control

- Cold white color - WHITE COLOR
- Warm white color - DAY LIGHT COLOR

Code	Description	PKG	WGT
021500	C LED bulb SMD 63 PAR56 WHITE 120° 20W/3465 lm	1	1
021501	C LED bulb SMD 252 PAR56 WHITE 120° 30W/4834 lux	1	1
021508	C LED bulb POWER 27 PAR56 WHITE 70W/6480 lux	1	1,1
021551	C LED bulb POWER SMD 252 LED PAR56 DAYLIGHT 120° 30W/3850 lux	1	1




RGB MR16 mini and PAR56 LED light bulbs. The three primary colors can be arbitrarily controlled in accordance to pre-installed programs. Polycarbonate lenses, polycarbonate or aluminum housing.

Built-in PCB board - two-wire cable

50,000 hours life

The lighting programme of the lamps can be changed by switching on and off the system. Before executing this, the system has to be operated for at least 3-4 minutes. In case of lamps that have an inner PCB control unit all the lamps are connected to one transformer. These control units make sure that the lighting programme has been changed in case of all lamps by switching them on and off with the help of the command received from the remote controller. Since the distances between the PCB-knives and the receiver units are different, in case of operation longer than 2 hours there might be synchronizing problems. In case if such problems emerge, the system has to be switched off, then turned on again within 7-13 minutes. Following this operation each of the lamps will continue to work with the same programme at the same time.

Code	Description	PKG	WGT
021800	C LED bulb 36 MR16 RGB 2,7W/336 lux	1	0,03
021900	C LED bulb POWER 3 MR16 RGB 4,0W/182lux	1	0,03
021700	C LED bulb SMD 54 PAR56 RGB 15W/1134 lux	1	1
021701	C LED bulb SMD 252 PAR56 RGB 30W/2217 lux	1	1
021708	C LED bulb POWER 27 PAR56 RGB 70W/3339 lux	1	1,1

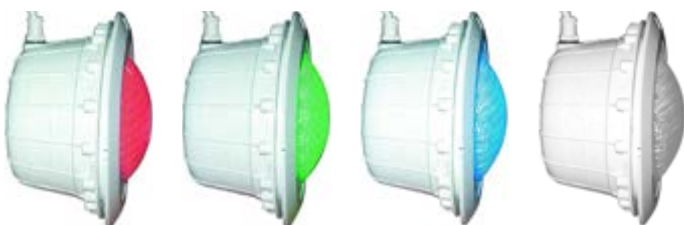


RGB + WHITE PAR56 LED izzók. 4 in 1: 18 RGB LED + 12 WHITE LED. Can be arbitrarily controlled in accordance to pre-installed programs.

- Polycarbonate lenses, polycarbonate or aluminum housing.
- Built-in PCB board - two-wire cable
- 50,000 hours life

Code	Description	PKG	WGT
021610	C LED bulb POWER 30 PAR56 RGB - WHITE 50W/4410 lm	1	1

ACCESSORIES

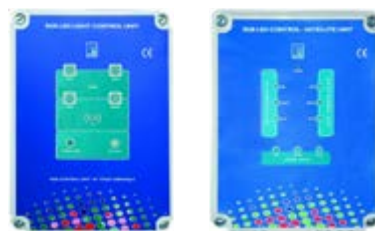

The central C-PCB (a veined cable is needed) types constitute the final solution in case of long-term operation or if synchronization problems related to multilamp (more than 10 lamps) systems occur. In case of C-PCB **RGB** LED lightbulbs a central control unit is absolutely necessary. The resilience of the system amounts to 300W/12V. In case of a multiple lamp solution satellite units are needed in line with the system's performance. The control unit can be time and remote controlled, it has 16 different programmes.

Code	Description	PKG	WGT
021751	C LED C-PCB bulb SMD 252 PAR56 RGB 30W/2217 lux	1	
021001	C LED RGB Remote Control with antenna	1	
021002	C LED RGB Board I with two terminals	1	
021003	C LED RGB Satellite board, for four terminals	1	
021004	C LED RGB remote control unit	1	



Code	Description	PKG	WGT
021000	C Remote Control max. 80m / 1000W	100	0,09



- 2 x 4mm H07RNF
- 2 x 6mm H07RNF

Code	Description	PKG	WGT
090105	C Transformator 105VA	1	2,3
090205	C Transformator 205VA	1	4,8
090315	C Transformator 315VA	1	5,6
090630	C Transformator 630VA	1	7,6
020303	C Underwater light cable 2x4 H07RNF	100	0,2
020304	C Underwater light cable 2x6 H07RNF	100	0,3



PAR56 300W/12V

Code	Description	PKG	WGT
020300	C Underwater light Hose conduit	50	0,18
020301	C Underwater light Junction boks	8	0,4
020302	C Underwater light bulb PAR56 300W/12V	12	0,68